

# DOCK EQUIPMENT & ACCESSORIES

## TRAILER STABILIZING JACK

- Keeps tractorless trailers level while being loaded or unloaded
- Prevents accidents if wheel support collapses
- Stabilizes vehicle against load shifts
- Lowered height: 39 1/2"
- Raised height: 51"
- Removeable 37 1/2" positioning and ratcheting handle
- 8" dia support pad
- 8" wheels
- 100,000 lbs. supporting capacity each and 40,000 lbs lifting capacity
- **Recommended use in pairs**
- 1 year warranty

Model No. KH777



## AUTO STAND TRAILER STABILIZING JACK

- Heavy gauge steel construction
- Large base pad (17" x 18 1/2")
- Gas activated, self levelling system
- 10" dia. pneumatic rubber tires for easy handling
- Large trailer contact pad
- Capacity: 100,000 lbs.
- One year warranty

Model No. KH791



## MOULDED DOCK BUMPERS

- Protects building and dock areas
- Shockproof, tear and freeze resistant
- Use models w/2" steel backup frame for added protection



Model No.	Type	Face size W" x H"	Overall Projection"	Wt. lbs.
KH005	Rectangular	13 x 10	4	16
KH009	Rectangular	18 x 10	4	32
KH007	Rectangular c/w frame	13 x 10	6	46
KH010	Rectangular c/w frame	18 x 10	6	92

## PALLET PULLER

- Efficient way to unload pallets from trucks
- Hardened teeth give positive grip in any pallet
- One person operation
- Pulls pallets straight or sideways to get out of tight spots
- Capacity: 5,000 lbs
- Weight: 16 lbs.


Model No. KH579



KLETON



Unload vans and trucks in minutes!



## CARGO BAR & HOOPS


- Prevent cargo from shifting and damage
- No permanent installation or adaptation required
- Quick installation and removal
- Replace expensive shoring or bulkheads
- One Piece Cargo Bar is all aluminum 1 1/2" square 14 gauge tubing that will not bend or give
- Easy-to-operate mechanical ratchet will not slip or vibrate loose and works well in freezing and wet conditions
- 4" square rubber protected end pads keep bar in place
- Adjusts from 89" to 105"
- Cargo Hoops are constructed from galvanized steel and measures 24" W x 29" L
- Expands the retention area to secure a large area of smaller boxes or cartons
- Installation hardware is included
- Hoops comes in pairs

One piece Cargo Bar adjusts from 89" to 105" long

**KINEDYNE**

Model No.	Description	Wt. lbs.
KH574	Aluminum bar	17
KH575	Hoops (pair)	15

Hoops come complete with installation hardware




## EXTRUDED RUBBER DOCK FENDERS

### D-4 DOCK FENDERS


- Guard against damaging impact
- Made of age, weather and abrasion-resistant synthetic rubber
- Easy to install and the trim appearance makes them well suited for use on trucks and truck docks
- Half oval shape allows radius to widen upon impact creating better deflection
- Easily installed manually or by power tools
- Hardware is concealed when installation is complete

Note: All given dimensions are nominal and may vary an average of 5% in manufacturing process.

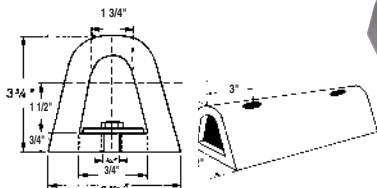

### MOUNTING D-4 DOCK FENDERS

- On Wood:** Use 1/2" Lag Screws
- On Concrete:** Use 1/2" Self-Drilling Fasteners
- On Steel:** Weld 1/2" Studs on Centers as Required



Mounting Bar

In all cases, a drilled metal bar 3/16" x 1 1/2" should be inserted in the bore of the fender to act as a continuous washer.



Diagonal



Horizontal



Vertical

Dimensions"	Anchor Holes	Approx. Wt. lbs.	Fender Drilled Model No.	Mounting Drilled Model No.
3 3/4 x 4 1/2 x 12	2 req., 6" *	4	KH658	KH662
3 3/4 x 4 1/2 x 18	2 req., 12" *	6	KH659	KH663
3 3/4 x 4 1/2 x 24	2 req., 18" *	9	KH660	KH664
3 3/4 x 4 1/2 x 36	3 req., 15" *	11	KH661	KH665

\* Between holes