

DRUM FAUCETS & GATE VALVES

MANUAL-CLOSING MOLASSES GATE VALVES

- Excellent for dispensing heavy oils, light grease, varnish, molasses, honey, cream and other non-flammable heavy viscous fluids from drums and containers
- All gates have 45-60° discharge for optimum flow control
- Durable cast iron body, painted black enamel finish
- Machined and lapped brass faceplate for smooth operation and perfect seal
- Can be padlocked in sizes up to and including 2"
- Standard gates come with either 2" or extra long 4" iron handle
- Extra long handle provides greater leverage for easier and safer dispensing of viscous fluids
- Gate valve with lock nut is used on drums with over-sized or damaged threads
- Malleable iron lock nut combined with rubber gasket allows valve to face any direction

Model No. NPT Inlet Size" Wt. lbs.

STANDARD GATE WITH 2" HANDLE

DA059	3/4	1.5
DA060	1	2.0
DA061	1 1/4	2.4
DA062	1 1/2	2.9
DA063	2	3.2
DA057	3	6.8
DA058	4	15.5


STANDARD GATE WITH 4" HANDLE

DA055	1 1/2	4.3
DA056	2	4.6
DA054	3	7.7

GATE VALVE WITH LOCK NUT, 2" HANDLE

DA051	3/4	1.6
DA052	1 1/2	3.2
DA053	2	3.6

Note: These faucets are intended for use with non-flammable viscous liquids stored in or dispensed from non-pressurized containers at ambient room temperature.

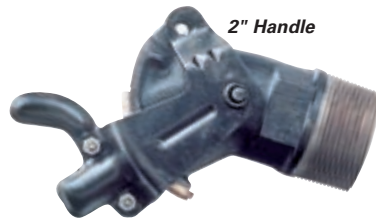

2" Handle



4" Handle



Locknut 2" Handle

ZINC DIE CAST FAUCET

- For non-flammable liquids only
- No flame arrestor
- 3/4" pipe thread
- Can be padlocked closed
- Weight: 0.38 lbs.

Model No. DA044



HEAVY-DUTY NATURAL DIE CAST FINISH FAUCET

- Flame arrestor safety faucet
- Standard 3/4" tapered pipe thread
- Celcon valve for longer life
- Natural die cast finish
- Product tested and approved by Factory Mutual
- For use with flammable and non-flammable liquids
- Weight: 0.5 lbs.

Model No. DC044



STAINLESS STEEL FAUCET

- Approved for use with oils and non-flammables compatible with stainless steel
- Internal flame arrestor
- Teflon® gasket, 3/4" NPT connection
- FM approved
- Weight: 2.00 lbs.

Model No. DA043



CORROSION-RESISTANT SAFETY FAUCET

- 304 stainless steel construction with Teflon® seals and "self-closing, no-drip spout"
- Suitable for safely dispensing flammables and corrosive liquids
- Guard prevents spout from jamming in open position
- Chemical or steam sterilization
- Flow capacity up to 1 GPM in fluids with viscosity to 250 SSU
- 3/4" NPT
- FM approved
- Weight: 1 lb.

Model No. DA050



MANUAL-CLOSING POLY FAUCETS

- Ideal for use with non-flammable, often corrosive liquids
- Half turn on/off; stays open until shut-off
- Use 2" size for thick, viscous liquids or larger volume flow of thin liquids



Model No. Bung Size" Wt. lbs.

DA048	2	0.50
DA049	3/4	0.08

DRUM LOCKOUT

- Prevents entry into storage drums
- Dual design for use in both 1/2" and 2" bung holes
- Zinc plated 1/2" solid rod catches the lip of drum to prevent removal
- 5/16" diameter hole accepts most standard padlocks (padlocks not included)
- Drum lock is solid brass construction
- Weight: 5 lbs.

Model No. DA654

Note: Not for use in applications where venting is required.



DRIP PAN

- Absorbs problem leaks and helps keep floors clean and safe
- Holds up to one gallon of liquid
- Pan is filled with polypropylene sorbent for oils, water-based and other non-aggressive liquids
- Rigid, sturdy construction helps prevent spillage during handling
- Dimensions: 10 1/2" square x 3" D
- Weight: 0.08 lbs.

Model No. DA105



SELF-CLOSING GATE VALVE

- FM approved for use with viscous non-corrosive fluids heavier than SAE30 motor oil (2000 SSU)
- Self-closing teflon blade has fast, positive shut off when handle is released

- 4 1/2" wide handle
- Wide opening permits maximum flow
- Fits 2" bung in steel or plastic drums
- Heavy duty brass construction
- Weight: 7 lbs.

Model No. DA042

