

SPILL CONTROL

WORKSTATIONS™

Workstations™ are the easiest to load with low profile design and optional ramp. One piece construction optimizes space for increased durability, safety and efficiency. With ample sump capacity in each workstation, this secondary containment product is perfect for a dispensing station or work centre. Each workstation is designed for stand-alone use or combines with other workstations for a customized work area. The rolled-edge design helps resist cracking and warpage.

- Tough polyethylene construction, cannot rust or corrode
- Multi-Purpose *Work Ramp™* hooks into any workstation for easy loading
- Heavy-duty removable structural foam grates for easy cleaning

LINK-LOCK™

- Link and lock multiple workstations together in a wide variety of configurations
- Made of 100% polyethylene
- Sold in pairs

| Model No. | Description | Exterior Dimensions L" x W" x H" | Sump Cap. US Gallons | Load Bearing Cap. lbs. | Wt. lbs. |
|-----------|-------------------|-------------------------------------|-------------------------|---------------------------|-------------|
| SR437 | 2-Drum | 53 x 28 1/2 x 6 | 22 | 2400 | 40 |
| SR436 | 4-Drum | 52 1/2 x 53 x 6 | 43 | 6000 | 73 |
| SR435 | 6-Drum | 76 1/2 x 53 x 6 | 61 | 7000 | 104 |
| SB764 | 8-Drum | 100 x 53 1/4 x 6 | 77 | 8000 | 139 |
| SAQ187 | <i>Work Ramp™</i> | 25 1/2 x 48 x 6 1/4 | - | 1000 | 30 |
| SAQ188 | <i>Link-Lock™</i> | 9 1/2 x 7 x 3 1/2 | - | - | 1.5 |



POLY-SPILLPALLET™ 2000


- 100% polyethylene
- Removable grates
- Forkliftable on two sides
- Holds two 45-gallon drums
- Load bearing capacity of 2000 lbs.
- Sump capacity of 58 US gallons
- Available with drain hole and plug
- Meets EPA 40 CFR 264.175
- Overall dimensions: 53 1/2" L x 29" W x 17" H



| Model No. | Mfg. No. | Description | Wt. lbs. |
|-----------|-----------|----------------------------------|----------|
| SC548 | 5253-YE | <i>Poly-Spillpallet™</i> | 63 |
| SC547 | 5253-YE-D | <i>Poly-Spillpallet™</i> w/Drain | 63 |

LOW-PROFILE IN-LINE POLY-SPILLPALLET™ 3000

- 100% polyethylene
- Holds four 45-gallon drums
- Low 12" profile
- Raised edge on back and sides helps orient drums on pallet
- Non-skid, removable grates
- Load bearing capacity of 3000 lbs.
- Sump capacity of 66 US gallons
- *Poly-Ramp™* allows for easy loading of pallet

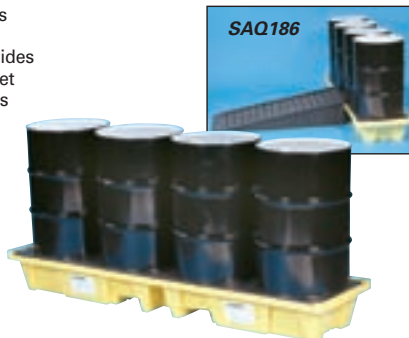

| Model No. | Description | Dimensions L" x W" x H" | Wt. lbs. |
|-----------|-----------------------------------|----------------------------|----------|
| SB762 | <i>Poly-Spill Pallet™</i> | 98 x 25 1/4 x 12 | 95 |
| SB763 | <i>Poly-Spill Pallet™</i> w/drain | 98 x 25 1/4 x 12 | 95 |
| SAQ186 | <i>Poly-Ramp™</i> | 67 x 30 1/2 x 12 3/4 | 60 |

POLY-SPILLPALLET™ 6000

- Includes the same rugged features as the *Poly-Spillpallet™ 2000*
- Two removable grates
- Forkliftable from all sides
- Holds four 45-gallon drums
- Load bearing capacity of 6000 lbs.
- Sump capacity of 83 US gallons



| Model No. | Description | Dimensions L" x W" x H" | Wt. lbs. |
|-----------|-----------------------------------|----------------------------|----------|
| SB795 | <i>Poly-Spill Pallet™</i> | 50 x 50 x 17 | 88 |
| SB794 | <i>Poly-Spill Pallet™</i> w/drain | 50 x 50 x 17 | 88 |

POLY-SLIM-LINE™ 6000

- Offers all of the same advantages as the *Poly-Spillpallet™ 6000*
- Features a low 12" profile
- Load bearing capacity of 6000 lbs.
- Sump capacity of 66 US gallons

MULTI-PURPOSE RACKER/STACKER™

- Holds up to two 45-gallon drums
- Unit can be placed on the floor (no sump) or on the *Poly-Slim Line™ 6000*
- Load bearing capacity of 2400 lbs.
- Use with the *Poly-Shelf™* for easy dispensing into 5 or 6-gallon pails
- Forkliftable
- *Poly-Ramp™* has a capacity of 1000 lbs.



| Model No. | Description | Dimensions L" x W" x H" | Wt. lbs. |
|-----------|--------------------------------------|----------------------------|----------|
| SE408 | <i>Poly-Slim-Line™</i> | 54 x 54 x 12 | 91 |
| SE409 | <i>Poly-Slim-Line™</i> w/drain | 54 x 54 x 12 | 91 |
| SE410 | <i>Multi-Purpose Racker/Stacker™</i> | 48 1/2 x 41 x 20 | 87 |
| SB773 | <i>Poly-Shelf™</i> | 17 x 22 x 17 1/2 | 10 |
| SAQ186 | <i>Poly-Ramp™</i> | 67 x 30 1/2 x 12 3/4 | 65 |
| SR442 | <i>Universal® Well Liner</i> | 12 3/4 x 15 1/2 x 2 1/2 | 1 |