

EXTENSION CORDS & LAMPS


THE PRO-TEC-TOR™ CIRCUIT BREAKER EXTENSION CORD

- The only extension cord with a circuit breaker that can be reset right at the outlet end
- Protects cord set from equipment overload, which can cause electrical fires
- Safety yellow SJTW cord



Model No.	Mfg. No.	Description	Wire Ga/Cond.	Voltage	Cord Length'	Rating Amps
HEAVY-DUTY						
XA084	LE14-25CB	Single Outlet	14/3	125	25	15
XA073	LE14-50CB	Single Outlet	14/3	125	50	15
XB983	LE14-T6	Triple Outlet	14/3	125	6	15
XA054	LE14-T25	Triple Outlet	14/3	125	25	15
XA059	LE14-T50	Triple Outlet	14/3	125	50	15
CONTRACTOR-DUTY						
XC057	LE12-T25	Triple Outlet	12/3	125	25	15
XA055	LE12-T50	Triple Outlet	12/3	125	50	15
XA056	LE12-T100	Triple Outlet	12/3	125	100	15

LAMPS

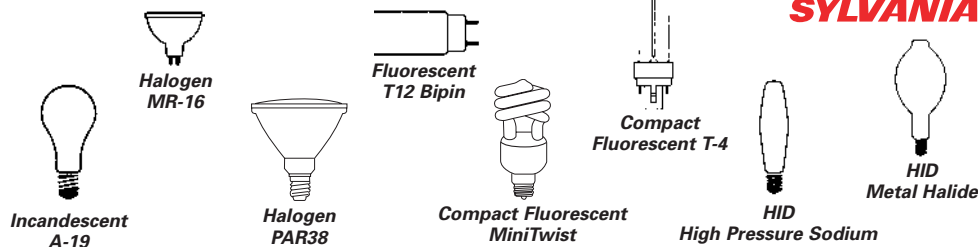

Nominal Watts	Lamp	Base	Model No.	Mfg. No.	Volts	Qty/Case	Description	Avg. life	Lumen output	L.C.L."	M.O.L."
INCANDESCENTS											
Sold per package of 2											
40	A-19	Med.	XB114	40A/2P/24/6000	120-125	12	Inside frost, long life, 2/pkg.	6000 hrs	480	3 1/8	4 7/16
50	A-19	Med.	XB122	50A/RS/2P/RP/120V	120	24	Inside frost, rough service, 2/pkg.	1000 hrs	480	2	3 15/16
60	A-19	Med.	XB115	60A/2P/24/6000	120-125	12	Inside frost, long life, 2/pkg.	6000 hrs	650	3 1/8	4 7/16
100	A-19	Med.	XB117	100A/2P/24/6000	120-125	12	Inside frost, long life, 2/pkg.	6000 hrs	1270	3 1/8	4 7/16
100	A-19	Med.	XB123	100ARS2PRP	120	24	Inside frost, rough service, 2/pkg.	1000 hrs	1260	2 7/8	4 7/16
Nominal Watts	Lamp	Base	Model No.	Mfg. No.	Volts	Qty/Case	Description	Avg. life	Beam spread		
HALOGEN											
Sold per each											
20	MR-16	GU5.3	XC305	20MR16/FL35		12	Reflector, flood beam	4000 hrs	700		35°
50	MR-16	GU5.3	XB153	50MR16/FL40 (EXN)		12	Reflector, flood beam	4000 hrs	2000		40°
50	PAR20	Med.	XB143	50PAR20/CAP/NFL		130	Narrow flood	2500 hrs	1250		30°
50	PAR30	Med.	XB137	50PAR30LN/CAP/WFL		130	Wide flood	2500 hrs	500		50°
75	PAR30	Med.	XB140	75PAR30LN/CAP/WFL		130	Wide flood	2500 hrs	750		50°
45	PAR38	Med.	XB133	45PAR38/CAP/SPL/FL/30/130V		130	Flood	2500 hrs	1600		30°
90	PAR38	Med.	XB135	90PAR38/CAP/SPL/FL/30/130V		130	Flood	2500 hrs	3600		30°
120	PAR38	Med.	XB235	120PAR38/CAP/SPL/FL/30/130V		130	Flood	3000 hrs	5000		30°
Nominal Watts	Nominal length"	Base	Model No.	Mfg. No.	Qty/Case	Description	Avg. life	Initial lumen output			
FLUORESCENTS - T12											
Sold per case											
34	48	Med. Bipin	XB916	F34CW/SS/ECO (F40CW/SS/ECO)	30	Cool white <i>Supersaver</i> ®	20000+ hrs	2700			
60	96	Single Pin	XB068	F96T12/CW/SS	15	Cool white <i>Supersaver</i> ®	12000 hrs	5300			
Nominal Watts	Lamp	MOL"	Base	Model No.	Mfg. No.	Qty/Case	Description	Avg. life	Initial lumen output		
COMPACT FLUORESCENTS											
Sold per each											
13	MiniTwist	4.5	Med.	XB913	CF13EL/MINITWIST/BL/1	6	3000K, 82 CRI	8000 hrs	800		
9	T-4	6.5	G23	XB277	CF9DS827	50	2700K, 82 CRI	10000 hrs	580		
13	T-4	7.1	GX23	XB275	CF13DS/841/ECO	50	4100K, 82 CRI	10000 hrs	800		
Watts	Lamp	Base	Model No.	Mfg. No.	Qty/Case	Description	Avg. life (hrs)	Approx. lumens (initial)	Approx. lumens (mean)	CRI	Colour temp
HID - HIGH PRESSURE SODIUM											
Sold per each											
50	E-17	Medium	XB205	LU50/MED	20	Clear	24000+	4000	3600	22	1900K
150	E-17	Medium	XB208	LU150/55V/MED	20	Clear, 55 volt	24000+	15800	13400	22	2100K
400	ET-18	Mogul	XB202	LU400/ECO	20	Clear	24000+	50000	45000	22	2100K
HID - METAL HALIDE											
Sold per each											
175	BT-28	Mogul	XB213	M175/U	6	Clear, univ. burn	10000V, 7500H	14400V, 12800H	12000V, 10300H	65	4200K
250	BT-28	Mogul	XB214	M250/U	6	Clear, univ. burn	10000V, 10000H	22000V, 20000H	17000V, 14100H	65	4200K
400	BT-37	Mogul	XB215	M400/U	6	Clear, univ. burn	20000V, 15000H	36000V, 32000H	25000V, 20500H	65	4000K
1000	BT-56	Mogul	XB217	M1000/U	6	Clear, univ. burn	15000V, 9000H	110000V, 107800H	88000V, 86300H	65	4000K

*Other lamps available upon request