

WELDING BLOWERS & BRACKETS

POWER CAT® PORTABLE BLOWER

- Provides the extra power to tackle tough, industrial jobs
- Unique portable blower can be used for ventilating, cooling and heating the work space
- Removes fumes and smoke created during welding through addition of accessories
- Choice of 300 CFM model blower, or variable 1120/877 CFM unit
- Fitted with a duplex receptacle featuring 25', heavy-duty grounded extension cord
- 120 Volt/60 Hz motor
- Accessories sold separately



ACCESSORIES FOR MODEL EA090



Model No.	Mfg. No.	Blower	Lamp	Receptacle
EA090	A300	300 CFM	40 Watts	Duplex, Grounded
EA091	1200XL	High Speed – 1120 CFM Low Speed – 877 CFM	N/A	Duplex, Grounded Weather-Resistant

ACCESSORIES

Model No.	Mfg. No.	Description
FOR USE WITH EA090		
EA092	300DA	Duct accessory. 10' x 5" flexible duct with exhaust adaptor.
EA093	300EXT	Extension accessory. 10' x 6" flexible duct with connecting sleeve and clamp. Use to extend EA092 and EA094 in 10' increments.
EA094	300IA	Intake accessory. 10' x 6" flexible duct with quick-mount fittings at both ends.
EA095	300FE	Welding Fume Exhaust Nozzle. Clamps to 300IA to direct intake of welding fumes.


ACCESSORIES FOR MODEL EA091



FOR USE WITH EA091		
EA096	1200EA	Extension accessory. Easily attaches to connect EA098 to unit.
EA097	1200IA	Intake Adaptor. Quick-mount fitting to attach duct to unit.
EA098	1200FD	Flexible Duct. 10' x 8" duct to be used with either EA096 or EA097.
EA099	1200DC	Duct Coupling. Clamp-on connector for additional EA098 ducts.
EA100	1200FE	Welding Fume Exhaust Nozzle. Clamps to EA098 for extraction of welding fumes.

POLY-CYLINDER MODULAR BUMPER BRACKETS™

- Modular design
- Holds one, two or three cylinders
- Attaches to any wall securely and easily
- Yellow polyethylene
- Accommodates 3" to 10" cylinders
- Dimensions: 16" L x 4" W x 4" H
- Weight: 2 lbs.
- OSHA 29 CFR.1910 approved

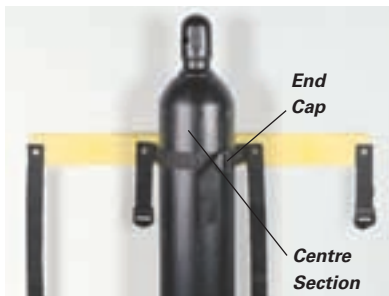


Model No.	Mfg. No.	Description
SE974	7215-YE	Centre Section
SE975	7214-YE	End Cap



POLY-CYLINDER BUMPER BRACKETS™

- Choose from a single or double cylinder design
- Bumper brackets easily and securely attach to any wall
- Durable nylon straps hold cylinders secure
- Rounded edges prevent cylinder from marring
- Low density polyethylene is rust and corrosion resistant, also resists sparking
- Accommodates cylinder diameters 3" to 10"
- Colour: Yellow
- OSHA 29 CFR.1910 approved

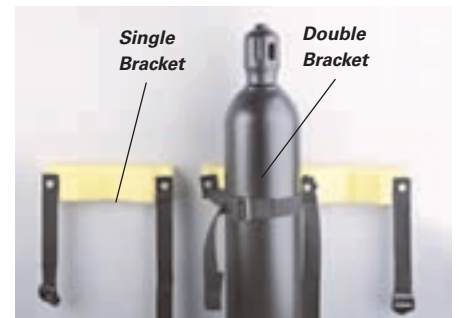

2-CYLINDER POLY-STAND™

- Free-standing design maximizes floor space
- Made of polyethylene resisting sparring, rust and corrosion
- Prevents accidental tipping with durable nylon straps to keep cylinders and stand secure
- Ideal for inexpensive wall-mounted storage
- Accommodates two cylinders with diameters of 3" to 12 3/8"
- Dimensions: 28" x 14" x 30"
- Load bearing capacity of 400 lbs.
- Weight: 14 lbs.
- Colour: Yellow
- OSHA 29 CFR.1910 regulation



Model No. SE966
Mfg. No. 7212-YE



21043E

Model No.	Mfg. No.	Description	Dimensions				Wt. lbs.
			L"	x W"	x H"	x H"	
SE972	7211-YE	Single	15	x 4	x 3	2	
SE973	7210-YE	Double	24	x 4	x 3	3	

GAS CYLINDER CART

- Weight: 30 lbs.
- Base dimensions: 19" x 10"
- Wheels: 10" Dia. semi-pneumatic
- Capacity: 144 cu.ft. or 244 cu.ft. oxygen, 130 cu.ft. acetylene cylinders

Model No. MD213
Mfg. No. 204/CC-4



B187