

DOCK EQUIPMENT & ACCESSORIES

TRAILER STABILIZING JACK

- Keeps tractorless trailers level while being loaded or unloaded
- Prevents accidents if wheel support collapses
- Stabilizes vehicle against load shifts
- Lowered height: 39 1/2"
- Raised height: 51"
- Removeable 37 1/2" positioning and ratcheting handle
- 8" dia support pad
- 8" wheels
- 100,000 lbs. supporting capacity each and 40,000 lbs lifting capacity
- **Recommended use in pairs**
- 1 year warranty

Model No. KH777



AUTO STAND TRAILER STABILIZING JACK

- Heavy gauge steel construction
- Large base pad (17" x 18 1/2")
- Gas activated, self levelling system
- 10" dia. pneumatic rubber tires for easy handling
- Large trailer contact pad
- Capacity: 100,000 lbs.
- One year warranty

Model No. KH791



MOULDED DOCK BUMPERS

- Protects building and dock areas
- Shockproof, tear and freeze resistant
- Use models w/2" steel backup frame for added protection



Model No.	Type	Face size W" x H"	Overall Projection"	Wt. lbs.
KH005	Rectangular	13 x 10	4	16
KH009	Rectangular	18 x 10	4	32
KH007	Rectangular c/w frame	13 x 10	6	46
KH010	Rectangular c/w frame	18 x 10	6	92

PALLET PULLER

- Efficient way to unload pallets from trucks
- Hardened teeth give positive grip in any pallet
- One person operation
- Pulls pallets straight or sideways to get out of tight spots
- Capacity: 5,000 lbs
- Weight: 16 lbs.


Model No. KH579



KLETON



Unload vans and trucks in minutes!



CARGO BAR & HOOPS


- Prevent cargo from shifting and damage
- No permanent installation or adaptation required
- Quick installation and removal
- Replace expensive shoring or bulkheads
- One Piece Cargo Bar is all aluminum 1 1/2" square 14 gauge tubing that will not bend or give
- Easy-to-operate mechanical ratchet will not slip or vibrate loose and works well in freezing and wet conditions
- 4" square rubber protected end pads keep bar in place
- Adjusts from 89" to 105"
- Cargo Hoops are constructed from galvanized steel and measures 24" W x 29" L
- Expands the retention area to secure a large area of smaller boxes or cartons
- Installation hardware is included
- Hoops comes in pairs

One piece Cargo Bar adjusts from 89" to 105" long

KINEDYNE

Model No.	Description	Wt. lbs.
KH574	Aluminum bar	17
KH575	Hoops (pair)	15

Hoops come complete with installation hardware




EXTRUDED RUBBER DOCK FENDERS

D-4 DOCK FENDERS


- Guard against damaging impact
- Made of age, weather and abrasion-resistant synthetic rubber
- Easy to install and the trim appearance makes them well suited for use on trucks and truck docks
- Half oval shape allows radius to widen upon impact creating better deflection
- Easily installed manually or by power tools
- Hardware is concealed when installation is complete

Note: All given dimensions are nominal and may vary an average of 5% in manufacturing process.

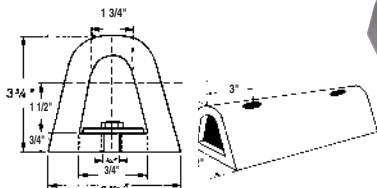

MOUNTING D-4 DOCK FENDERS

- On Wood:** Use 1/2" Lag Screws
- On Concrete:** Use 1/2" Self-Drilling Fasteners
- On Steel:** Weld 1/2" Studs on Centers as Required



Mounting Bar

In all cases, a drilled metal bar 3/16" x 1 1/2" should be inserted in the bore of the fender to act as a continuous washer.



Diagonal



Horizontal



Vertical

Dimensions"	Anchor Holes	Approx. Wt. lbs.	Fender Drilled Model No.	Mounting Drilled Model No.
3 3/4 x 4 1/2 x 12	2 req., 6" *	4	KH658	KH662
3 3/4 x 4 1/2 x 18	2 req., 12" *	6	KH659	KH663
3 3/4 x 4 1/2 x 24	2 req., 18" *	9	KH660	KH664
3 3/4 x 4 1/2 x 36	3 req., 15" *	11	KH661	KH665

* Between holes

DOCK EQUIPMENT & ACCESSORIES

MODULAR CABLE AND HOSE PROTECTION SYSTEMS

Benefits:


- Weather and abrasion resistant; high load-bearing capacity
- Insulates electrical cables from human contact
- Makes length-of-run calculations easy
- Increases traction
- Lightweight; easy to transport, set-up, breakdown, and store; multi-length applications
- Allows for moving with ease
- High visibility

Features:

- Polyurethane construction, non-conductive material
- 36" length per lineal protector
- 5 bar tread plate surface
- Safety warning symbols moulded onto lid or ramp
- Modular interlocking design
- Recessed carrying handle
- Universal safety colours

HEAVY-DUTY 2, 3, 4, 5 CHANNEL SYSTEMS


For heavy trucks and forklifts in industrial environments. Colour: Yellow lid/Orange base.

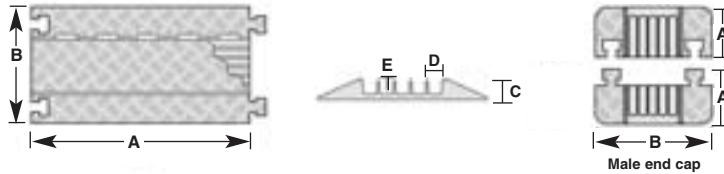

Model No.	Description	A Length"	B Width"	C Height"	D Channel Width"	E Channel Height"	Max Load Lbs. Per Tire*	Weight lbs.
KH687	5 Channel Protector	36	20	2 5/16	1 1/4	1 1/4	20150	29
KH688 (Pair only)	5 Channel End Caps (Female)	7 1/2	20	2 5/16	1 1/4	1 1/4		4.7
	5 Channel End Caps (Male)	5 1/4	20	2 5/16	1 1/4	1 1/4		4.7
KH691	4 Channel Protector	36	20	2 5/16	2	1 1/4	20150	29
KH692 (Pair only)	4 Channel End Caps (Female)	7 1/2	20	2 5/16	2	1 1/4		4.7
	4 Channel End Caps (Male)	5 1/4	20	2 5/16	2	1 1/4		4.7
KH695	3 Channel Protector	36	20	3 1/16	2 1/4	2 1/4	14210	36
KH696 (Pair only)	3 Channel End Caps (Female)	8 1/4	20	3 1/16	2 1/4	2 1/4		6.5
	3 Channel End Caps (Male)	6	20	3 1/16	2 1/4	2 1/4		6.5
KH699	2 Channel End Protector	36	22	4 1/8	3 1/4	3 1/4	10880	33

GENERAL PURPOSE AND LIGHT-DUTY CHANNEL SYSTEMS

For lightweight vehicle and pedestrian traffic

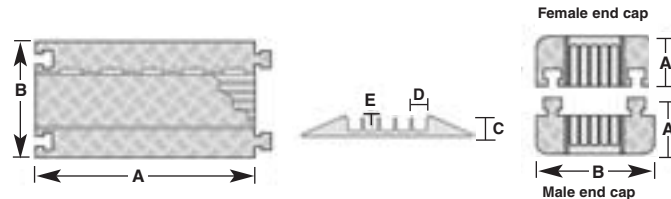

Model No.	Description	A L"	B W"	C H"	D Channel W"	E H"	Max Load Lbs. Per Tire	Weight
KH700	5 Channel Protector	36	17 1/2	1 15/16	1 5/16	1 5/16	10500	18
KH701	5 Channel End Caps (Female)	4 3/4	17 1/2	1 15/16	1 5/16	1 5/16		2.2
	(Male)	4 3/4	17 1/2	1 15/16	1 5/16	1 5/16		2.7
KH702	1 Channel Protector	36	11 1/2	1 19/32	1 1/4	-	11700	8

POLYETHYLENE CORNER PROTECTOR

- Ideal for application where corners are exposed
- 2 1/4" wide shock absorbing moulded polyethylene design to provide ample impact protection
- Dimensions: 10" W x 6.5" D x 40.5"H
- Weight: 3lbs
- Colour: Safety yellow colour for high visibility

Model No. KH813



POLYETHYLENE WALL PROTECTOR

- Non-corrosive and ideal for either indoor or outdoor applications
- Mounts to building walls to protect them from scratches and dents
- Overall dimensions: 48" L x 2 1/4" W x 6 1/4" H
- Installation hardware not included
- Includes: 3/8" counter sunk mounting holes and reverse tapered ends to overlap when used with multiple units
- Weight: 3 lbs.
- Colour: Safety yellow for visibility

Model No. KH812



CHECKERS
INDUSTRIAL PRODUCTS, INC.

