

DOLLIES

WOOD DOLLIES

MEDIUM DUTY

- 900-lbs. capacity
- 7/8" wood top; countersunk bolts
- 3" polyolefin casters
- Carpeted dolly will prevent marks and scratches on equipment being moved
- Shipped knocked down



Model No.	Dim."	Platform Type	Wt. lbs.
MA186	18 x 24	Standard	26
MA187	18 x 24	Carpeted	28
MD515	18 x 30	Standard	32
MD516	18 x 30	Carpeted	34

HEAVY-DUTY

- 1200-lbs. capacity
- 1 3/4" wood top (2 x 1 1/16" pieces); countersunk bolts
- 4" resilient non-marking casters
- Carpeted dolly will prevent marks/ scratches on equipment
- Shipped knocked down



Model No.	Dim."	Platform Type	Wt. lbs.
MA188	18 x 24	Standard	30
MA189	18 x 24	Carpeted	32
MD517	18 x 30	Standard	38
MD518	18 x 30	Carpeted	40

WOOD DOLLY RACKS


- Convert basic wood dolly into multi-purpose caddy
- Tubular steel rack is padded to protect the goods being transported
- Rack only (dolly sold separately)



Model No.	For Wood Dolly Model	Wt. lbs.
MD549	MA186	12
MD550	MD515	15

ANGLE FRAME DOLLY

- 1200-lbs. capacity
- 1 1/2" x 1 1/2" angle construction
- 4" resilient non-marking casters



Model No.	Dim."	Wt. lbs.
MA193	24 x 36	30

POLYETHYLENE DOLLIES

- 1000-lbs. capacity
- Modular, high-impact polyethylene design
- Won't splinter, swell or rot
- Round corners and edges with channel steel reinforced sides
- Rolls easily on 4" rubber swivel casters



Model No.	Dim."	Platform Type	Wt. lbs.
MA194	18 x 30	Flush Deck	21
MA195	18 x 30	Padded Rubber Deck	23

STEEL DECK DOLLIES

- 1200-lbs. capacity
- 14 gauge steel deck
- 4" resilient non-marking casters
- Model MA199 - Optional 34" long steel rod for ease of movement under full loads



Model No.	Dim."	Wt. lbs.
MA242	18 x 18	23
MA243	18 x 24	25
MA244	24 x 24	27
MA199	34" handle	2

LIGHTWEIGHT ALUMINUM DOLLIES

- 840-lbs. capacity
- Low profile design with swivel casters and 3" diameter polyolefin wheels
- Riveted, aluminum construction
- Lightweight
- Pierced rim for attaching hook, rope or chain



Model No.	Dim."	Wt. lbs.
MD519	18 x 24	12
MD520	21 x 30	14

HEAVY-DUTY ALUMINUM DOLLIES

- 2000-lbs. capacity
- Light, tough and highly manoeuvrable
- High strength, all welded extruded aluminum construction
- 5" phenolic swivel casters, roller bearing mounted



Model No.	Dim."	Wt. lbs.
MD521	21 x 36	35
MD522	24 x 42	39

ALUMINUM DECK DOLLIES

- 1200-lbs. capacity
- 3/8" aluminum treadplate construction, countersunk bolts
- 4" resilient non-marking casters



Model No.	Dim."	Wt. lbs.
MA196	18 x 18	25
MA197	18 x 24	27
MA198	24 x 24	30

STEEL DRUM DOLLIES


- Welded frames are built to withstand constant use
- 24" inside diameter handles 45-gallon drums
- Shipped knocked down




Model No.	Frame Style	Approx. Height"	Wheel Type	Cap. lbs.	Wt. lbs.
DA583	X-Frame	5 1/2	3" Polyolefin	750	22
DA602	Round	5 1/2	3" Polyolefin	750	22

PRY DOLLIES

- Move heavy boxes, die blocks and machinery
- Heavy-duty nose plate gets under the load, 6' steel or wooden handle gives tremendous leverage
- Come with 5" x 2" polyurethane casters
- Use in pairs to move large objects without the need of a separate dolly



Model No.	Handle	Cap. lbs.	Nose Plate"	Wt. lbs.
MF870	Wood	4250	6 x 3	34
MF871	Steel	5000	6 x 3 3/8	35

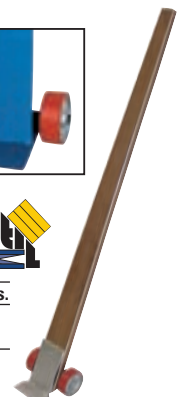

Customize it to your specifications. See page B56 for details

DRUM HEATERS

THERMOSTAT CONTROL HEATERS



- Heats materials with good heat receptivity
- Made of aluminized steel; conjunction box made of galvanized steel
- Increases flow rate of viscous material
- Reaches and maintains a given temperature
- Thermostat bulb senses temperature and controls pre-set heat
- Three-heat switch allows three wattage ratings per thermostat setting
- HIGH setting uses Max. Watts; MEDIUM, 1/2 Max. Watts; LOW, 1/4 Max. Watts
- Neon pilot light
- 6' power cord



Model No.	Drum Cap. Gal.	Drum Dia. "	Temp Range	Plug Type Nema no.	Volts	Watts	Wt. lbs.
DA072	45	22 1/2	60-250°F	5-20	120	1750	15
DA073	45	22 1/2	200-400°F	5-20	120	1750	15
DA092	45	22 1/2	60-250°F	5-20	120	1920	15
DA093	45	22 1/2	200-400°F	5-20	120	1920	15
DA094	45	22 1/2	60-250°F	6-15	240	3000	15
DA095	45	22 1/2	200-400°F	6-15	240	3000	15
DA087	16	14 1/2	60-250°F	5-15	120	1500	8
DA088	16	14 1/2	200-400°F	5-15	120	1500	8
DA090	5	11 1/4	60-250°F	5-15	120	1500	5
DA091	5	11 1/4	200-400°F	5-15	120	1500	5

VALUE HEATER

- Sturdy aluminized steel construction outlasts and outperforms all silicone rubber heaters
- 0-550°F adjustable thermostat offers wide flexibility when heating contents of 45 gallon, 22 1/2" diameter steel drums
- Heavy duty, 5' grounded cordset plugs into standard 120 V outlets, 1250 watts
- Wt.: 8 lbs.



Model No. DA070

WATER BOIL-OFF HEATER

- Reduces waste removal costs by reducing the water weight from non-flammable, non-toxic solutions, reducing the amount of material requiring disposal
- For use with 45 gallon steel drums only
- Features a 70-300°F thermostat range and a high limit cut off-switch that can be reset
- When water is reduced below the level of the heater the unit shuts off
- Plug type is NEMA no. 6-15
- 240 volts, 3000 watts, 6' power cord
- Wt.: 14 lbs.



Model No. DA096

HEATED DRUM DOLLIES

- Heat transportable products with this combination drum heater/dolly
- 15 1/4" square, 1/4" thick aluminum heater platen will heat a drum of water to 140°F in 8 hours
- Variable cycle control supplies a pulsing heating action, for gentle heating of drum contents
- Designed exclusively for 45 gallon steel drums
- Diameter: 24" inside, 28 1/2" outside
- Top surface of heater is 3 1/2" above floor surface, overall unit height is 6"
- Rolls on four 3" diameter phenolic casters with a capacity of 900 lbs.



Model No.	Plug Type NEMA no.	Volts	Watts	Wt. lbs.
DA076	5-20	120	1750	80
DA077	6-15	240	1920	80

NOTE:

Do not use these heaters in hazardous areas or to heat flammable materials. For indoor use only.

CONFIGURATION NEMA



5-15P



6-15P



5-20P

VARIABLE CYCLE CONTROL HEATERS

- Designed to heat materials that have a tendency to burn or coke such as light oils, chemicals, food, and undercoating material
- Variable control cycles heat current on and off
- Ratio of 'time on' to 'time off' increases as setting switch is moved higher
- Cycling allows for a gentle heating of drum contents
- Three heat switch allows three wattage ratings per thermostat setting
- HIGH setting uses Max. Watts; MEDIUM 1/2 Max. Watts; LOW, 1/4 Max. Watts
- Neon pilot light
- 6' power cord



Model No.	Drum Cap. Gal.	Drum Dia. "	Plug Type NEMA no.	Volts	Watts	Wt. lbs.
DA085	45	22 1/2	5-20	120	1750	15
DA086	45	22 1/2	6-15	240	3000	15
DA082	16	14 1/2	5-15	120	1500	8
DA084	5	11 1/4	5-15	120	1500	5

PLASTIC DRUM HEATERS


- Specifically designed to heat materials contained in polyethylene drums or pails
- Pre-set bimetal thermostat is mounted directly on heating band; activated with on-off switch
- Heat delivered to drum does not exceed 165°F
- 9" wide heating band on 45-gallon model is double the width of standard heaters; increases heater surface area for a shorter heat-up time
- On-off indicator light
- 6' power cord



Model No.	Drum Cap. Gal.	Drum Dia. "	Plug Type NEMA no.	Volts	Watts	Wt. lbs.
DA081	45	22 1/2	5-15	120	800	15
DA080	5	11 1/4	5-15	120	100	7

5-GALLON PAIL HEATER

- Economy 5-gallon heater is suitable for use with plastic & metal pails
- For light duty applications like increasing flow of viscous fluids or heating water
- Aluminized construction
- Adjustable strap clamp allows heater to fit pails with straight or tapered sides from 9 1/2" to 12" in diameter
- 120 volts, 100 watts
- 6' power cord with standard three pin grounded plug
- Wt.: 0.5 lbs.



Model No. DA074

SPILL CONTROL

THE POLY-RACK™ SYSTEM

The most efficient dispensing/storage system!

POLY-RACKER™


- One-piece polyethylene rack that holds two 45-gallon drums
- 100 plus gallon containment sump
- Deep dispensing well easily holds 5-gallon pails
- Both sides of the unit have a drain plug
- Entire unit can be transported by forklift
- Rated to hold up to 3000 lbs.

POLY-STACKER™

- Holds two 45-gallon drums
- Can be quickly stacked with a forklift
- Any spills from the second and third level falls into the dispensing well for containment and easy cleanup

POLY-SHELF™

- It easily attaches to *Poly-Stacker™*
- Allows simultaneous dispensing from all drums
- A hole in the bottom of the *Poly-Shelf™* drains into the dispensing well in the *Poly-Racker™*

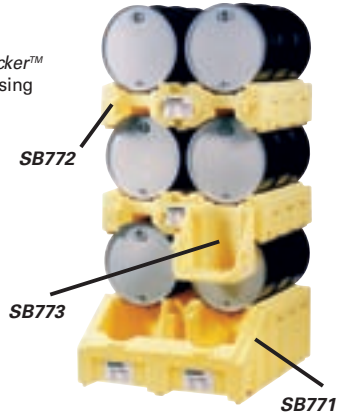

Model No.	Mfg. No.	Description	Max Capacity lbs.	Dimensions L" x W" x H"	Wt. lbs.
SB771	6000-YE	<i>Poly-Racker™</i>	3000	49 x 52 1/2 x 22 1/2	120
SB772	6002-YE	<i>Poly-Stacker™</i>	2400	49 x 41 x 13	56
SR466	6006-YE	Single <i>Poly-Racker™</i>	1600	31 x 53 x 32	95
SR467	6007-YE	Single <i>Poly-Stacker™</i>	800	31 x 40 1/2 x 20	50
SB773*	6003-YE	<i>Poly-Shelf™</i>	10	17 x 22 x 17 1/2	10

*Use only with *Poly-Racker™* or *Poly-Stacker™*

POLY-SAFETYPACK®

Safe, secure two-drum storage!

- Tough, indoor or outdoor performer protects two 45-gallon drums
- Hinged, gull-wing covers
- 100% polyethylene; chemical and weather resistant
- Security lock included
- Removable polyethylene grating 48" x 24" x 1 3/4"
- Translucent yellow sidewalls allow visual leak detection
- Easily handles by forklift or pallet jack from two sides
- For easier mobility, use the *Poly-Safetypack®* caster frame assembly **SE565**
- 135 US gallon sump capacity
- **Exterior Dimensions:** 60 1/4" L x 36 1/2" W x 45 3/4" H
- **Interior Dimensions:** 52" L x 26 1/2" W x 37" H



Model	Mfg No.	Description	Wt. lbs.
SB757	2038-YE	<i>Poly-Safetypack®</i>	115
SR415	2038-YE-D	<i>Poly-Safetypack®</i> W/Drain	115
SE565	2200-BK	<i>Poly-Safetypack®</i> Caster Frame	37

POLY-OVERPACK® 95 SALVAGE DRUM

Lightweight polyethylene Overpack can contain a broad range of hazardous chemicals including acids and corrosives!

- Damaged and deformed drums can be overpacked easily
- Twist on lid with a closed cell polyethylene gasket can be closed securely and easily by using any long object, like a two-by-four
- Accepts all 45-gallon drums
- Meets performance-oriented packaging requirements of U.S. DOT and UN regulations as well as Group 1 packaging standards and salvage drum regulations
- Moulded area allows for easy gripping and pick-up by material handling equipment
- **Exterior dimensions:** 31 3/4" top dia. x 26" bottom dia. x 41 1/2" H
- **Interior dimensions:** 27" top dia. x 24 3/4" bottom dia. x 37" H
- 95 US gallon sump capacity



Model No.	Description	Wt. lbs.
SB756	<i>Poly Overpack® 95</i>	53
DA224	Drum Lifter	21

SPILL SCOOTER™

- Polyethylene construction
- Contains incidental spills and drips
- Spout included for easy draining
- Fits drums up to 45 gallons
- Optional metal T-handle available separately, 36 5/8" long
- **Dimensions:** 34 1/2" diameter x 9" high
- 500-lbs. load bearing capacity
- 10 US gallon capacity



Model No.	Description	Wt. lbs.
SB767	<i>Spill Scooter™</i>	22.5
SC554	T-handle	4

22351E



POLY-OVERPACK® 20 & 30

- Versatile units that can contain solids and sludges with security
- Nestable for compact shipment
- 1/2-turn lid for easy opening and closing
- Built-in shoulder for easy handling
- UN rated salvage drums

POLY-OVERPACK® 20

- Accepts bottles, cans, and 5-gallon pails
- **Exterior dimensions:** 23" top dia. x 18" bottom dia. x 19" H
- **Interior dimensions:** 21 1/2" top dia. x 17" bottom dia. x 17 1/2" H
- 20 US-gallon sump capacity



POLY-OVERPACK® 30

- Unit can contain up to 16 US gallon drums
- **Exterior dimensions:** 23" top dia. x 18" bottom dia. x 30" H
- **Interior dimensions:** 21 1/2" top dia. x 17" bottom dia. x 28 1/2" H
- 30 US-gallon sump capacity

Model No.	Description	Wt. lbs.
SAG189	<i>Poly-Overpack® 20</i>	10
SAH551	<i>Poly-Overpack® 30</i>	13



POLY-DOLLY®

The multi-functional, two-wheel dispensing station!

- Transports 45-gallon drums with ease
- Tilts to become an efficient self-dispensing station
- Acts as its own secondary containment unit
- Integrally moulded handles for extra strength
- Double looped strap for easy loading
- Accessible to forklift from the rear
- Raised ribbed dispensing well
- Drain plug for removal of contents from sump
- Available as an *All Terrain Dolly*
- **Dimensions:** 69" L x 32 1/2" W x 26 1/2" H
- 80 US gallon sump capacity
- 600-lbs. load bearing capacity

SB769



Order No.	Mfg. No.	Description	Wt. lbs.
SB769	5300-YE	<i>Poly-Dolly®</i>	92
SB770	5300-YE-A	<i>Poly-Dolly®</i> ATD*	96
SR444	5312-YE-A	<i>Poly-Dolly®</i> Cover	-

*All Terrain Dolly with heavy-duty pneumatic rubber wheels.



SR444

B111

DRUM HANDLERS

DRUM ROCKERS

- Safe method of upending up to 45 gallon drums for moving, draining or storing
- No lifting, straining, or danger of drum tipping backwards
- Load drum into the draining position in seconds
- Constructed of all welded heavy gauge steel tubing
- Handle is removable
- Swivel casters are 2 1/2" polyolefin, wheels are 3" polyolefin
- Capacity: 1000 lbs.

KLETON



Model No.	Description	Wt. lbs.
DA592	Two swivel casters, two 3" wheels	38
DA591	Four 3" wheels	35
DA589	Frame only, no wheels	31

LOW PROFILE DRUM TRUCK

- Ideal for moving full, open top 45-gallon drums without spilling contents
- With a low-level frame, only 1" from the ground, this truck allows for easy loading of drums up to 1000 lbs.
- Hinged handle moves forward and backward for easy pushing or pulling
- All-welded steel construction with 8" x 2" rubber wheels and 4" resilient non-marking swivel caster for smooth movement and easy manoeuvrability
- Weight: 35 lbs.

Model No. DA579

KLETON



MOBILE DRUM KARRIERS

- Transports, rotates, tilts and drains fully loaded drums up to 800 lbs.
- Easy to operate
- Drum can be raised to a floor clearance of 5 1/8" to 11 1/2", automatically sets lock which prevents unintentional lowering
- Tilt lock on each side of unit keeps drum in desired position
- All-welded steel construction; 8" polyolefin wheels and 4" swivel caster for easy manoeuvrability
- Weight: 106 lbs.

MORSE

Model No.	Drum Size
DA189	45-gallon steel; 22 1/2" dia.
DA190	45-gallon plastic and steel; 22 1/2" - 24" dia., 34" - 36" H
DA191	25 and 45 gallon steel; 18" - 22 1/2" dia.
DA192	21" - 23" dia. fibre and steel
DA193	25 and 45 gallon fibre and steel; 18 1/2" - 22 1/2" dia.

STEEL DRUM DOLLIES

- Built to withstand constant use
- All-welded frame
- 24" inside diameter handles
- 45-gallon drums



DA602



DA583

KLETON

Model No.	Frame Style	Approx. Height"	Wheel Type	Cap. lbs.	Wt. lbs.
DA602	Round	5 1/2	3" Polyolefin	750	22
DA583	X-Frame	5 1/2	3" Polyolefin	750	22

POLYETHYLENE DOLLY

This 500 lbs. capacity, structural foam polyethylene dolly won't dent, corrode or rust. Solid bottom construction with 2" lip contains small spills. Handles 45 gallon drums. Overall dimensions: 24 3/8" diameter x 7 1/8" H. Rolls on five 3" hard rubber casters. Weight: 17 lbs. Colour: Black.

Model No. NA714



Rubbermaid
Commercial Products

LIL'DOLLY™ PAIL DOLLY

- Designed for use in hospitals, food processing plants, manufacturing locations, hotels, restaurants
- anywhere 5, 6 & 15 gallon pails are used
- 5 dual wheel swivel stem casters
- Inside diameter: 11"
- Capacity: 75 lbs.
- Weight: 2 lbs.
- Colour: Beige

Model No. MD527



DRIP CATCHER DOLLY

This oversize drum dolly catches drips in the pan, keeps area around drum clean. Handles standard 45-gallon drums and larger containers up to 27" in diameter. 2" lip contains drips, holds absorbent sock (included).

Overall dimensions: 31 1/2" diameter x 5 3/4" H 3 3/4" x 1/4" rubber casters. Capacity: 1000 lbs. Weight: 26 lbs. Colour: Safety yellow.

Model No. DA600



VALLEYCRAFT
ALL IN A DAY'S WORK