

DRUM FAUCETS & GATE VALVES

MANUAL-CLOSING MOLASSES GATE VALVES

- Excellent for dispensing heavy oils, light grease, varnish, molasses, honey, cream and other non-flammable heavy viscous fluids from drums and containers
- All gates have 45-60° discharge for optimum flow control
- Durable cast iron body, painted black enamel finish
- Machined and lapped brass faceplate for smooth operation and perfect seal
- Can be padlocked in sizes up to and including 2"
- Standard gates come with either 2" or extra long 4" iron handle
- Extra long handle provides greater leverage for easier and safer dispensing of viscous fluids
- Gate valve with lock nut is used on drums with over-sized or damaged threads
- Malleable iron lock nut combined with rubber gasket allows valve to face any direction

Model No. NPT Inlet Size" Wt. lbs.

STANDARD GATE WITH 2" HANDLE

DA059	3/4	1.5
DA060	1	2.0
DA061	1 1/4	2.4
DA062	1 1/2	2.9
DA063	2	3.2
DA057	3	6.8
DA058	4	15.5

STANDARD GATE WITH 4" HANDLE

DA055	1 1/2	4.3
DA056	2	4.6
DA054	3	7.7

GATE VALVE WITH LOCK NUT, 2" HANDLE

DA051	3/4	1.6
DA052	1 1/2	3.2
DA053	2	3.6

Note: These faucets are intended for use with non-flammable viscous liquids stored in or dispensed from non-pressurized containers at ambient room temperature.



2" Handle



4" Handle



Locknut 2" Handle

ZINC DIE CAST FAUCET

- For non-flammable liquids only
- No flame arrestor
- 3/4" pipe thread
- Can be padlocked closed
- Weight: 0.38 lbs.

Model No. DA044



HEAVY-DUTY NATURAL DIE CAST FINISH FAUCET

- Flame arrestor safety faucet
- Standard 3/4" tapered pipe thread
- Celcon valve for longer life
- Natural die cast finish
- Product tested and approved by Factory Mutual
- For use with flammable and non-flammable liquids
- Weight: 0.5 lbs.

Model No. DC044



STAINLESS STEEL FAUCET

- Approved for use with oils and non-flammables compatible with stainless steel
- Internal flame arrestor
- Teflon® gasket, 3/4" NPT connection
- FM approved
- Weight: 2.00 lbs.

Model No. DA043



CORROSION-RESISTANT SAFETY FAUCET

- 304 stainless steel construction with Teflon® seals and "self-closing, no-drip spout"
- Suitable for safely dispensing flammables and corrosive liquids
- Guard prevents spout from jamming in open position
- Chemical or steam sterilization
- Flow capacity up to 1 GPM in fluids with viscosity to 250 SSU
- 3/4" NPT
- FM approved
- Weight: 1 lb.

Model No. DA050



MANUAL-CLOSING POLY FAUCETS

- Ideal for use with non-flammable, often corrosive liquids
- Half turn on/off; stays open until shut-off
- Use 2" size for thick, viscous liquids or larger volume flow of thin liquids



Model No. Bung Size" Wt. lbs.

DA048	2	0.50
DA049	3/4	0.08

DRUM LOCKOUT

- Prevents entry into storage drums
- Dual design for use in both 1/2" and 2" bung holes
- Zinc plated 1/2" solid rod catches the lip of drum to prevent removal
- 5/16" diameter hole accepts most standard padlocks (padlocks not included)
- Drum lock is solid brass construction
- Weight: 5 lbs.

Model No. DA654

Note: Not for use in applications where venting is required.



DRIP PAN

- Absorbs problem leaks and helps keep floors clean and safe
- Holds up to one gallon of liquid
- Pan is filled with polypropylene sorbent for oils, water-based and other non-aggressive liquids
- Rigid, sturdy construction helps prevent spillage during handling
- Dimensions: 10 1/2" square x 3" D
- Weight: 0.08 lbs.

Model No. DA105



SELF-CLOSING GATE VALVE

- FM approved for use with viscous non-corrosive fluids heavier than SAE30 motor oil (2000 SSU)
- Self-closing teflon blade has fast, positive shut off when handle is released

- 4 1/2" wide handle
- Wide opening permits maximum flow
- Fits 2" bung in steel or plastic drums
- Heavy duty brass construction
- Weight: 7 lbs.

Model No. DA042




DRUM PUMPS & ACCESSORIES

Before ordering any pump, establishing compatibility with the MSDS of the fluid used in application is a must!
Bond/ground cables on page B116 are required when pumping flammable or combustible liquids.

STAINLESS STEEL PUMPS

- Efficient transfer of liquids from 25 or 45-gallon drums
- Stainless/Teflon® pump handles most liquids, including aggressive acids and corrosives
- 316 stainless steel construction with Teflon® piston, shaft and seal
- Stainless/polyethylene pump withstands phosphoric acids and alkalis
- Chrome plated steel pump with polyethylene components handles mildly corrosive water based fluids, solvents and light oils
- All pumps fit standard 2" bung and deliver 8 oz. per stroke
- 25" L with a 7" L x 1/2" O.D. spout and 22" L suction tube
- Weight: 3 lbs.

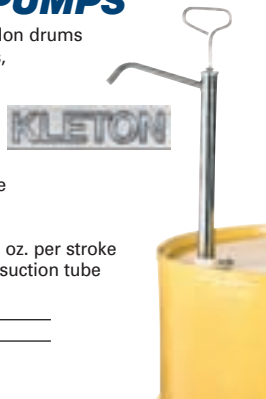

Model No.	Pump Construction
DA531	316 SS/Teflon®
DA530	304 SS/Polyethylene
DA527	Chrome Steel/Polyethylene

TRANSFER PUMP

- Non-corrosive, double action piston pump is designed to handle most petroleum products, solvents and industrial chemicals with viscosities up to 2000 SSU
- Discharges 1 quart per stroke with a suction lift to 15'
- Handle can be mounted above or below pump
- Tamper proof feature enables padlocking to protect against unauthorized use
- Thermoplastic constructed pump has a polyester glass reinforced body, Vitor® "O" ring and cork-nitrile gasket
- All internal metal parts in contact with liquid are 316 stainless steel
- Includes 8' PVC black vinyl discharge hose, 2-piece 1" x 34" L polyester suction tube, polyester discharge spout and 2" bung adaptor
- Weight: 11 lbs.



Model No. DA526

HORIZONTAL DRUM GAUGE

- Reads instantly and accurately the amount of liquid in a 45-gallon drum
- Mounts through 2" bung hole; seals tight and won't leak
- Reads in 5-gallon intervals
- Weight: 2 lbs.



Model No. DA067

GRADUATED DRUM GAUGES

- The solution to visually gauging contents of horizontal drums
- Excellent for most oils, solvents and chemicals
- Combination gauge and faucet permits uninterrupted draining of drum contents with gauge in place
- Mounts through 3/4" bung hole
- Constructed of heavy gauge glass in plated steel body with Buna-N seals
- Weight: 3 lbs.



Model No.	Description
DA064	Gauge only
DA065	Gauge with faucet*

*Zinc die cast faucet FM approved for viscous liquids only; no flame arrestor.

DRUM FILL GAUGE

- Provides a low cost solution to over-filling drums
- When drum is almost full, indicator "Pops-Up" to warn you
- Fits in standard 3/4" bung opening, and is 5"L
- Bright red and yellow moulded polyethylene
- FM approved
- Weight: 0.2 oz.

Model No. DA066



STAINLESS STEEL LIFT STYLE PUMPS

- Excellent for the fast transfer of acids and corrosives
- Delivers 22 oz. per stroke
- Model DA529 is constructed of 304 stainless steel with Teflon® seal
- Model DB845 is constructed of 316 stainless steel with Teflon® seal
- Fits standard 2" bung for 45 gallon drums
- 45" L with a 7" L x 3/4" O.D. spout
- Weight: 6 lbs.

Model No. DA529

Model No. DB845



ROTARY PUMPS

- Efficiently pumps 5 gallons per 80 handle revolutions
- Body and blades are constructed of rugged cast iron
- Model DA528 handles medium viscosity petroleum based products such as light oils
- Model DA536 with non-sparking nozzle is ideal for transferring gasoline and diesel fuel
- Both models pump in either direction, out the nozzle or in the nozzle, when used with partially submerged hose and cranked in opposite direction
- 1 1/4" x 40" steel suction tube, 1" discharge tube, 2" bung adaptor
- Weight: 17 lbs.

Model No. DA528

Model No. DA536



SAFETY PUMPS

- FM Approved for handling flammables
- Comes complete with internal flame arrestor, steel bung adaptor to aid static grounding, and heavy duty bonding wires to remove hazardous static charge
- Steel pickup tube with internal screen keeps debris out of pump
- Constructed of highly polished carbon steel with Teflon® piston, packing and gasket for exceptional chemical and solvent resistance
- Pumps 8 oz. per stroke, designed to fit 45 gallon drums
- Also available in stainless steel for corrosive flammable liquids
- Weight: 5 lbs.

Model No. DA513 Carbon Steel

Model No. DB831 Stainless Steel

VERTICAL DRUM GAUGES

- Accurate "At-A-Glance" monitoring
- Easy-to-read gauge is calibrated in gallons, litres and percentage remaining in drum
- Monitors liquid level in vertical 45-gallon drums
- Heavy steel and plastic construction with leak proof neoprene gaskets
- Resistant to oil and many chemicals
- Available for 3/4" or 2" NPT bung opening
- Weight: 1 lbs.



Model No.	Bung Size"
DA069	3/4
DA068	2



ENVIRO-WEDGE™

- Increases the amount of product pumped out of 25-45 gallon drums
- Reduces the amount of expensive product left in drum while also allowing for easier drum reconditioning and disposal
- 100% recycled, rugged polyethylene construction
- Weight: 1.5 lbs.

Model No. DA660

