

# SHOWERS & FALL PROTECTION

## COMBINATION SHOWER/EYEWASH

Easy-to-install combination drench shower eyewash station should be located within 100 feet of hazardous areas, equipped with 1 1/4" IPS galvanized steel pipe, impact-resistant shower head and eyewash bowl. Stay open ball valves assure safe, hands-free operation. All units painted high visibility yellow and equipped with wall mount safety sign.

### DRENCH SHOWER TESTER

- Heavy-duty tester provides a convenient way to comply with ANSI specifications for weekly testing on all drench showers - without getting wet
- 84" long, watertight funnel with weighted bottom directs water to a drain or bucket
- 8' telescoping aluminum handle
- Testing record card included




Model No.	Description	Wt. lbs.
SA415	Combination Shower	60
SC338	Drench Shower Tester	5



## EMERGENCY SHOWER STATION MAT NO. 465

Use under emergency showers or eyewash stations to draw attention to the emergency equipment and to keep accident victims from slipping.

- 7/8" thick with drainage ports throughout, keeps employees safely above the overflow area as the hazardous chemicals are washed off
- High-traction design on the mats surface also provides safe footing
- Following the ANSI Z535.1-1998 standard for colour-coding, the mat effectively calls attention to the safety shower (red) or eyewash areas (green)
- Highly visible tiles designate the location of first aid and safety equipment, and the yellow borders denote caution
- Borders are 6" wide and have a gradual slope for easy access

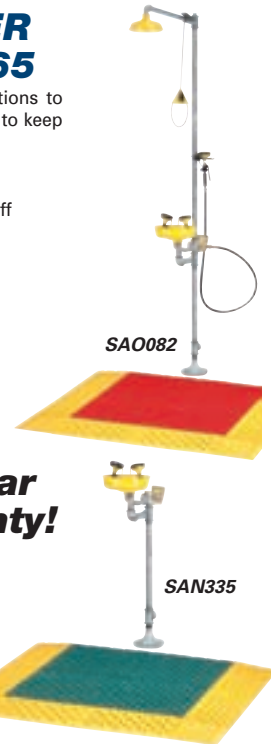

**1-year warranty!**



Model No.	W"	Dim. x	L"	Colours
SAN335	30	x	36	Green
SAN336	30	x	48	Green
SAO082	30	x	36	Red
SAO083	30	x	48	Red

## OVERHEAD SHOWERS

Drench showers provide fast drench of complete body in seconds. Hands-free ball valve activates immediately, 10" Impact resistant plastic shower head. Available for horizontal or vertical supply. SEI certified. Meets ANSI Z358.1 standards.



Model No.	Description	Wt. lbs.
SA414	Horizontal Supply	7
SA416	Vertical Supply	5



## TITAN® CONTRACTOR'S HARNESSSES

Titan™ full-body harnesses are made from lightweight durable polyester webbing for all day comfort and dependability.

- Fully adjustable design
- Sliding back D-ring
- Sub-pelvic strap
- Universal fit (other sizes available upon request)
- Colour: Orange
- Meets all applicable OSHA, ANSI and CSA requirements



Model No.	Mfg. No.	Side D-Rings	Shoulder Strap Buckles	Leg Strap Buckles	Chest Strap Buckle	CSA Group
SN064	T4000/UAK	No	Mating	Mating	Mating	A
SN065	T4007/UAK	Yes	Mating	Mating	Mating	A, P
SN066	T4500/UAK	No	Mating	Tongue	Mating	A
SN067	T4507/UAK	Yes	Mating	Tongue	Mating	A, P

## TITAN® SHOCK-ABSORBING LANYARDS

Titan™ lanyards are made of lightweight, durable polyester webbing, 6' (1.8 m) length and locking snap hook for the harness.

**Tubular built-in core style** features a built-in woven inner core which smoothly expands to reduce fall arrest forces, while the outer jacket serves as a back-up web lanyard.

Standard length is 6'; also available in lengths from 4' to 10'. Locking snap hook - 3/4" gate opening.

Model No. SN069



B206

## MILLER® MANYARD® SHOCK-ABSORBING LANYARDS

With 20 years of design refinement, the Miller® Manyard® shock-absorbing lanyards are unsurpassed in the market.

- Special woven shock-absorbing inner core reduces fall arrest forces
- Heavy-duty tubular outer jacket serves as a back-up web lanyard
- Unique warning flag provides visual proof that a lanyard has been involved in a fall and should be removed from service
- Harness connection: locking snap hook



Model No.	Mfg. No.	Number of leg	Anchorage Connection	Length'
SC980	216WLS/4FTYL	One	Locking Snap Hook	4
SC981	216WLS/5FTYL	One	Locking Snap Hook	5
SC982	216WLS/6FTYL	One	Locking Snap Hook	6
SC983	216WLS/8FTYL	One	Locking Snap Hook	8
SC984	219WRS/4FTYL	One	Locking Rebar Hook	4
SC985	219WRS/5FTYL	One	Locking Rebar Hook	5
SC986	219WRS/6FTYL	One	Locking Rebar Hook	6
SC987	219WRS/8FTYL	One	Locking Rebar Hook	8
SAH529	231WRS/6FTYL	Two	Locking Rebar Hook	6

## MILLER® POSITIONING & RESTRAINT LANYARDS

Nylon rope lanyards are recommended for "work positioning" and "restraint" only. Harness connection: Locking snap hook.



Model No.	Mfg. No.	Anchorage Connection	Length'
SA012	201RLS-2/4FTWH	Locking Snap Hook	4
SA013	201RLS-2/6FTWH	Locking Snap Hook	6
SA014	201RLS-2/8FTWH	Locking Snap Hook	8
SD512	202RRS-2/4FTWH	Locking Rebar Hook	4
SD513	202RRS-2/6FTWH	Locking Rebar Hook	6
SD514	202RRS-2/8FTWH	Locking Rebar Hook	8

# FALL ARREST EQUIPMENT

## MINILITE™ FALL LIMITER

Quick-activating braking system that limits a free fall to inches. In contrast to shock-absorbing lanyards, a fall limiter eliminates the need for extended fall distance clearance. This minimizes the risk of injuries and makes rescue easy.

- Offers up to 11 feet of working capacity
- Lightweight, compact design – only 2.5 lbs.
- Corrosion-resistant interior, frame and components
- Visual load indicator
- High-impact protective outer cover
- Prominent reflective labeling
- Available with a variety of integral anchorage connectors
- Meets OSHA, ANSI, CSA Z259.2.2 type 1 and CE requirements



Model No.	Description
SG987	With Steel Twist Lock Carabiner and Stainless Steel Swivel Shackle
SG988	Without Anchorage Connector
SG989	With Steel Twist-Lock Carabiner

## RETRACTABLE WEB LANYARDS

- 8' (2.4 m) long w/locking swivel snap hook
- Retractable web lanyards are the lightest SRL's available
- Engineered to provide maximum protection in places where lanyards might get in the way
- Equipped with 2" (50 mm) webbing, a tough vinyl cover and mounting karabiner
- CSA type: Fall Arrest type 1



### APPLICATIONS:

- General fall protection
- Stock pickers in warehouses
- Aerial lift applications (i.e. scissor-lifts)
- Also available in other configurations to suit a variety of applications upon request

Model No. **SN122**  
Mfg. No. FP0304

## WORKMAN™ HARNESSES

- Economical
- Abrasion-resistant, strong, durable webbing
- Yellow polyester webbing for high visibility
- Web retainer collars to keep excess webbing neat
- Easy to don and adjust
- Qwik-Fit™ chest strap
- CSA certified
- Size: Standard
- Other sizes available upon request
- Meets OSHA regulations, and ANSI A10.32 and Z359.1



SAP167



Model No.	Mfg. No.	D-Rings	
		Back	Hip
<b>TONGUE BUCKLE LEG STRAPS</b>			
SAP167	10072487	Yes	No
SAP168	10072491	Yes	Yes
<b>QWIK-FIT™ LEG STRAPS</b>			
SAP203	10072479	Yes	No
SAP166	10072483	Yes	No

## DURABILT SERIES FROM NORTH

### FEATURES:

- Priced right to satisfy your needs
- User friendly
- Polyester webbing for greater resistance to chemicals
- Large Back D-ring
- Universal style with our one size fits most

### SAFETY & QUALITY

- Meets or exceeds all standards CSA, ANSI and OSHA
- North doesn't just make it, they make sure it works: North tests all products to all applicable standards to ensure your safety
- ISO 9001 manufacturing facility

### COST EFFECTIVENESS

- Basic universal harness for everyday use
- Requires less sizes to carry
- No bells and whistles
- Lightweight
- Everything you will need in one kit (bag included)
- No sacrificing of quality for a better price



## HARNESSES

Model No.	Mfg. No.	Description
SAH533	FPD698/1DP	Full body harness
SAH534	FPD698/1DGP	Full body harness w/grommetted legs

## LANYARDS

Polyester decelerator energy absorbing lanyard with double locking snap hook harness connectors.

Model No.	Mfg. No.	Anchors Connectors	Length'
SAH537	FPD29811/4	Double locking snap hook	4
SAH750	FPD29811/6	Double locking snap hook	6
SAH538	FPD29819/4	Double locking rebar hook	4
SAH761	FPD29819/6	Double locking rebar hook	6

## WORKMAN™ ENERGY-ABSORBING LANYARDS

- Lightweight with a low-profile body
- Shock absorber includes a clear, durable protective cover over the labels to increase service life and allow for easy inspection
- Tear-tape design to keep fall arrest forces below 900 lbs.
- Choice of single-leg or twin-leg configuration
- Choice of adjustable or tie-back configuration
- Meets OSHA regulations, and ANSI A10.32 and Z359.1
- CSA certified



Model No.	Mfg. No.	Description	Length'
SAP195	10072472	Single-leg, tie-back w/LC locking snaps	6
SAP196	10072474	Single-leg, adjustable w/LC locking snaps	6
SAP197	10072475	Twin-leg, adjustable w/LC locking snaps	6