

HEATERS & FANS

RADIANT PLUG-IN UNDER DESK HEATER

- Safe comfortable radiant heat
- Extremely economical to operate - only draws 1.4 A
- Will not effect computer work stations
- Includes velcro tabs and wire support hardware for easy installation
- Lighted on-off kick switch
- Built-in safety tip-over switch



| Volts | Watts | Amps | Dim" |
|-------|-------|------|-------------|
| 120 | 170 | 1.4 | 15 x 22 x 1 |

Model No. BA960

PORTABLE FAN FORCED/RADIANT UTILITY HEATER

- Three heat settings provide fuller comfort and efficient operation
- 600 W radiant, 900 W fan forced
- 1500 W fan forced and radiant
- Chrome-plated safety grille
- Automatic built-in thermostat
- Ceramic core element
- Tip over safety switch and thermal limit
- Two years warranty



| Model No. | Volts | Watts | BTU/H | Amps |
|-----------|-------|--------------|----------------|--------------|
| BA963 | 120 | 600/900/1500 | 2048/3072/5120 | 5.0/7.5/12.5 |

PORTABLE OPEN COIL HEATER

- Two heat settings (1500 W and 1000 W)
- Provides full comfort and efficient operation
- Fully adjustable automatic thermostat
- Safety overload switch
- Power signal light
- Top mounted handle and controls
- Grounded plug and controls
- Two years warranty



| Model No. | Volts | Watts | BTU/H | Amps |
|-----------|-------|-----------|-----------|----------|
| BA967 | 120 | 1000/1500 | 3410/5120 | 8.3/12/5 |

SMOKE EJECTORS

- Remove smoke, welding fumes and undesirable contaminants from the air or bring clean air in
- Reversible smoke ejectors are equipped with a totally enclosed ball bearing motor with automatic overload protection
- Units are CSA approved
- Explosion proof models in accordance with Class 1 Group D/Class II Group EFG
- All are 115 V AC, 1/3 HP, 1725 RPM equipped with a 6' power cord, cord holder and cadmium plated protection guards
- Hoses are fire safe single ply neoprene impregnated nylon



| Model No. | Type | CFM @ 10" SP | Fan Dia." | Box Dimensions | | | | |
|-----------|------------|--------------|-----------|----------------|---|--------|---|--------|
| | | | | L" | x | W" | x | H" |
| BA099 | Standard | 1620 | 12 | 16 | x | 14 5/8 | x | 14 5/8 |
| BA100 | Exp. Proof | 1620 | 12 | 16 | x | 14 5/8 | x | 14 5/8 |
| BA101 | Standard | 3050 | 16 | 13 5/8 | x | 18 1/2 | x | 18 1/2 |
| BA102 | Exp. Proof | 3050 | 16 | 13 5/8 | x | 18 1/2 | x | 18 1/2 |
| BA103 | Standard | 3700 | 18 | 14 3/8 | x | 21 | x | 21 |
| BA104 | Exp. Proof | 3700 | 18 | 14 3/8 | x | 21 | x | 21 |

COLLAR ADAPTORS

| Model No. | Fan Dia" |
|-----------|----------|
| BA026 | 12 |
| BA028 | 16 |
| BA029 | 18 |

FLEXIBLE HOSES

| Model No. | Fan Length' | Fan Dia." |
|-----------|-------------|-----------|
| BA049 | 15 | 12 |
| BA050 | 20 | 16 |
| BA051 | 20 | 18 |

INDUSTRIAL GRADE, HIGH VOLUME BELT-DRIVE DRUM FANS

High volume, heavy-duty portable air circulators are ideal for cooling warehouses, garages, workshops and other similar buildings. Heavy-gauge, sturdy steel construction provides durability. Large rubber wheels and two handles for easy movement. Complete with 10' grounded cords.



NI275



| Model No. | Drive Type | Blade Size" | Volts | HP | Max Amps | CFM | Wt. lbs. |
|-----------|------------|-------------|-------|-----|----------|--------|----------|
| EA108 | Belt | 36 | 120 | 1/2 | 8 | 14,800 | 111 |
| EA109 | Belt | 42 | 120 | 3/4 | 10.8 | 18,000 | 132 |
| NI275 | Belt | 48 | 120 | 1 | 15 | 23,000 | 153 |

PORTABLE FAN FORCED UTILITY HEATER

- Two heat settings provide full comfort and economic operation
- Automatic built-in thermostat
- Fan only setting
- Tip over safety switch and thermal limit control
- Built-in carrying handle and front safety guards
- Safety buzzer sounds if unit is tipped over
- Two-year warranty



| Model No. | Volts | Watts | BTU/H | Amps | Plug |
|-----------|-------|-----------|-----------|-----------|--------------|
| EA006 | 120 | 1300/1500 | 4437/5120 | 10.8/12.5 | Non-grounded |
| BA965 | 120 | 1300/1500 | 4437/5120 | 10.8/12.5 | Grounded |

CONTRACTOR HEATER

- Built-in thermostat
- Safety high temperature limit
- Steel spiral fin brazed to metal sheath elements for maximum heat transfer
- 6' heavy-duty cord
- Built-in handle/cord storage
- Permanently lubricated motor



| Model No. | Volts | PH | Watts | BTU/H | Amps | Plug Type | Wt. lbs. |
|-----------|---------|----|-----------|---------------|-----------|-----------|----------|
| EA005 | 240/208 | 1 | 4800/3600 | 16,380/12,285 | 20.0/17.3 | #6-30P | 17 |

FAHRENHEAT HEAVY-DUTY CEILING MOUNT HEATER

- Multi wattage covering 2500-5000 W (2500 W, 3332 W, 4165 W, 5000 W)
- Rugged heavy-duty industrial heater
- Ideal for use in barns, storage rooms, workshops, garages, warehousing
- Built-in ceiling bracket for easy mounting
- Automatic fan delay
- 240 V



Model No. EA012

AIR CIRCULATION EQUIPMENT

AIR CIRCULATING FANS

- Effectively cools large areas in factories, offices, stores, cafeterias and other public places
- Provide relief from heat by creating gentle movements of air
- 2 speeds, 120 V, ball bearing totally enclosed permanently lubricated permanent split capacitor with pull chain
- Built-in thermal overload protection included
- Fan heads are available on an adjustable pedestal base or a rugged wall mount
- The heavy gauge 27" steel dome base is connected with 5 carriage bolts and is adjustable from 48 7/8" to 74 5/8" high
- The one-piece rigid wall mount bracket can be installed on wood, metal or concrete (hardware not included)
- Precision balanced coated steel blades
- Double locking chrome plated fan guards
- 3-conductor SJT type cord for added safety
- Meets OSHA standards, UL and ULC listed

Limited
2-year
warranty!



Marley
Industrial Products



EA250

INDUSTRIAL AIR CIRCULATORS (NON OSCILLATING)

1/4 hp 2-speed motors

Fan head tilt - Pedestal: 10° down or 28° up. Wall mount: 40° down or 0° up.

| Pedestal Model No | Wall Mount Model No | Blade Size" | Volts | HP | Max Amps | CFM High-Low |
|-------------------|---------------------|-------------|-------|-----|----------|--------------|
| EA250 | EA251 | 24 | 120 | 1/4 | 2.2 | 7000-5900 |
| EA252 | EA253 | 30 | 120 | 1/4 | 2.5 | 8200-6200 |

EA251



INDUSTRIAL AIR CIRCULATORS (OSCILLATING)

1/4 hp 2-speed motors

Oscillates in 90° arc or can be locked in a fixed position

Fan head tilt: Pedestal or wall mount: 15° up or down.

| Pedestal Model No | Wall Mount Model No | Blade Size" | Volts | HP | Max Amps | CFM High-Low |
|-------------------|---------------------|-------------|-------|-----|----------|--------------|
| NI252 | NI249 | 24 | 120 | 1/4 | 2.2 | 7000-5900 |
| NI080 | NI250 | 30 | 120 | 1/4 | 2.5 | 8200-6200 |

LIGHT INDUSTRIAL AIR CIRCULATING FANS

- Features high performance motors for quiet operation
- 3-speed control and adjustable height
- Durable full metal construction
- Includes built-in thermal fuse for safety
- Finish: Black epoxy painted blades, and silver grey stand/wall mount
- All models can be used in an oscillating or non-oscillating manner



Marley
Industrial Products

1-year
warranty!



EA257

| Pedestal Model No. | Weight lbs. | Wall Model No. | Weight lbs. | Blade Size" | HP | Max. Amps | CFM High | CFM Medium | CFM Low | RPM High |
|--------------------|-------------|----------------|-------------|-------------|-----|-----------|----------|------------|---------|----------|
| EA257 | 56 | EA259 | 35 | 24 | 1/4 | 2.0 | 8122 | 6000 | 3900 | 1200 |
| EA258 | 61 | EA260 | 36 | 30 | 1/4 | 2.0 | 10594 | 7800 | 5650 | 1200 |

LEADING EDGE CEILING FANS

Ceiling fans will recirculate warm air and heat from the ceiling and push it down. In summer a ceiling fan system supplements air-conditioned areas by reducing the temperature. They will save energy and cut fuel costs. Adjustable speed control not included.

HEAVY-DUTY COMMERCIAL CEILING FANS

- 36" fan is designed for smaller areas
- Ideally suited for isolated areas and as a supplemental cooling fan

HEAVY-DUTY INDUSTRIAL CEILING FANS

- 56" fan for spacious applications where maximum area coverage is required
- For both heat destratification and summertime cooling
- Powerful, heavy-duty motor for mounting heights to 45 feet



REVERSIBLE CEILING FAN

- Patented dual pitch fan provides identical airflow volume in either forward or reverse rotation
- Ideally suited for exhausting stale air and condensation removal
- For industrial applications with mounting heights of 10' or higher

| Model No. | Blade Size" | Max Volts | CFM | * Area Coverage Per Fan | Wt. lbs. |
|-----------|-------------|-----------|--------|-------------------------|----------|
| NI271 | 36 | 120 | 12,500 | 1600 sq. ft. | 20 |
| NI272 | 48 | 120 | 21,000 | 2025 sq. ft. | 22 |

COMMERCIAL CEILING FANS

| | | | | | |
|-------|----|-----|--------|--------------|----|
| BA318 | 56 | 120 | 27,500 | 3800 sq. ft. | 24 |
| BA319 | 60 | 120 | 46,000 | 5000 sq. ft. | 30 |

INDUSTRIAL CEILING FANS

| | | | | | |
|-------|----|-----|--------|--------------|----|
| BA318 | 56 | 120 | 27,500 | 3800 sq. ft. | 24 |
| BA319 | 60 | 120 | 46,000 | 5000 sq. ft. | 30 |

REVERSIBLE CEILING FAN

| | | | | | |
|-------|----|-----|--------|--------------|----|
| BA320 | 56 | 120 | 27,000 | 3800 sq. ft. | 24 |
|-------|----|-----|--------|--------------|----|

*Area coverage rated for heat destratification at 20' blade mounting height.


B54

ECONOMICAL CEILING FANS

Prevent heat loss in your plant, cut fuel costs by up to 30% and increase employee productivity with these economical ceiling fans.

For: manufacturing plants, warehouses, repair shops, aircraft hangers, restaurants, indoor tennis courts, auditoriums.

- Recirculates hot air and heat from ceiling down to floor and work area
- Use wasted heat from production processes and lighting systems
- Air movement in summer reduces humidity and temperature 8° (chill effect)
- Easily installed, uses 110 V/60 Hz

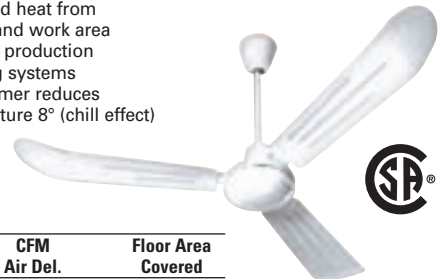

| Model No. | Fan Dia." | CFM Air Del. | Floor Area Covered |
|-----------|-----------|--------------|--------------------|
| BA152 | 36 | 7,100 | 600 cu.ft. |
| BA154 | 48 | 13,000 | 900 cu.ft. |
| BA156 | 56 | 20,500 | 1,500 cu.ft. |

CONTROLS

| | | |
|-------|----------------|------------------------|
| BA186 | Variable Speed | Controls 1 Fan |
| BA187 | Variable Speed | Controls up to 3 Fans |
| BA185 | Variable Speed | Controls up to 10 Fans |

ADJUSTABLE SPEED CONTROL FOR CEILING FANS

- Manufactured to UL specifications
- For single and multiple fan installations

| Model No. | Volts | Amps | # of Ceiling Fans Controlled 56" Blade | 60" Blade |
|-----------|-------|------|--|-----------|
| BA323 | 120 | 3 | 2 | 1 |
| BA324 | 120 | 6 | 5 | 3 |
| BA325 | 120 | 8 | 6 | 4 |
| BA326 | 120 | 12 | 10 | 8 |

