

EYEWASH STATIONS

FLASH FLOOD

Portable self-contained eyewash station, classified as a personal (secondary) eyewash device, provides flexible emergency eyewash capability in economical systems. Includes a 1-gallon container of *Eyesaline*® solution providing three full minutes of gravity fed flow. The protective nozzle covers are easily pulled off in an emergency and each nozzle has a built-in filter for extra protection.



Model No.	Description	Wt. lbs.
SA419	FlashFlood eyewash station	14
SA403	<i>Eyesaline</i> ® 1 gal. refills (4/pkg.)	36
SA420	Wire rack for cartridges	3
SA421	Replacement pull strap	1



PORTA-STREAM I & II

Self-contained high-impact polyethylene eyewash units mount on any wall or sit on a level surface. Single pull strap once activated, leaves workers hands free to hold eyes open. Available in 70-oz. or 180-oz. units. Each unit supplied with *Eyesaline*® concentrate to mix with water. Optional dust cover available to keep flushing area free of contaminants. Removal of cover pulls off retainer caps and activates flow.



Model No.	Description	Wt. lbs.
SA425	Porta-Stream 1 - 6 gal., 6 min. flush	19
SA427*	Porta-Stream 2 - 16 gal., 15 min. flush	36
SA408	<i>Eyesaline</i> ® concentrate, for (SA425) 70 oz.	5
SA411	<i>Eyesaline</i> ® concentrate, for (SA427) 180 oz.	13
SA426	Replacement pull-strap (SA425,SA427)	1
SA412	Dust Cover (SA425, SA427)	1



* SEI certified to meet ANSI Z358.1

PURE FLOW 1000™

- Sure-grip handle provides instant, simple activation
- Activation straps display expiration date
- Integral drain valve allows easy draining of reservoir after use
- Integral fluid reservoir captures waste fluid, eliminating potential safety hazards and simplifying fluid disposal
- Once activated, this device automatically displays a prominent, *Warning Service Immediately* notice on the front of the unit; new fluid cartridges must be installed
- Requires two 3.8 gal. *Eyesaline*® fluid cartridges (sold separately)
- Fluid cartridges have a 24-month shelf life
- Device must be mounted on a wall or other suitable vertical surface
- Comes complete with product registration card, operating manual, metal hanging bracket for installation and an emergency eye wash sign
- SEI certified to meet ANSI Z358.1 standard



Model No.	Description	Wt. lbs.
SD552	Eyewash station (English Instructions)	40
SAJ678	Eyewash station (French Instructions)	40
SD553	Fluid cartridges (2/pkg)	70



WALL MOUNTED EYEWASH UNIT

- Includes 10" diameter corrosion-resistant stainless bowl with stainless steel cover
- Exposed pipes and wall bracket are protected with *Bradect*™ safety yellow polyurethane coating to protect unit from corrosion
- Activated by a highly visible plastic push handle and stay-open ball valve
- Dust cover pops open when highly visible stainless steel push handle is activated
- Includes safety sign and inspection tag
- Weight: 9 lbs.
- Meets ANSI Z358.1 Standards
- SEI Certified

Model No. SA438
MFG No. S19-220DC



EYEWASH STATIONS

Wall stations provide job site convenience and immediate accessibility. Visible with full emergency use instructions in front. Constructed of sturdy high-impact plastic. Available in single 16 oz. or double 32 oz. full squeeze bottles or with empty spout and eye cup bottle. Solution is sterile isotonic. Includes four pre-drilled holes for easy wall mounting. Empty spill spout and eye cup bottles available separately. Ideal for high eye hazard areas.

Model No.	Mfg. No.	Description	NORTH	Size"
SINGLE STATIONS				
SAK725*	E/A3827	W/Empty 16 oz. Spill Spout and Eye Cup		11 x 14
SAK726*	E/A3832	Panel Only		11 x 14
SR370	E/A3840	W/32 oz. Squeeze Bottle		6 1/2 x 11
SR371	E/A3837	Panel Only		6 1/2 x 11
SD556	E/A3825	W/Empty 32 oz. Spill Spout and Eye Cup		14 x 17
SD557	E/A3830	Panel Only		14 x 17

DOUBLE STATIONS				
SN702	E/A3841	W/2-32 oz. Squeeze Bottles		11 x 14
SR372	E/A3838	Panel Only		11 x 14
SR373*	E/A3826	W/2 Empty 32 oz. Spill Spout and Eye Cup		14 x 17
SR374*	E/A3831	Panel Only		14 x 17

REPLACEMENTS

SAK727	E/A3836	Empty 16 oz. Spill Spout and Eye Cup Bottle
YA094	E/A3835	Empty 32 oz. Spill Spout and Eye Cup Bottle
SAK728	E/1507AISO	16 oz. Eyewash Solution
SN703	E/1507BISO	32 oz. Eyewash Solution
SR375	E/1507CISO	4 litres Eyewash Solution

* Without mirror



FAUCET EYEWASH STATIONS

- Chrome-plated brass faucet-mounted eyewash converts any faucet into an emergency eyewash station
- No special plumbing required, won't interfere with normal faucet operation
- Easy to operate, turn on water and pull out knob to activate eyewash
- Water pressure holds spring loaded valve open, leaving hands free
- Push in knob to turn off water to revert faucet to normal operation
- No tools required, complete with adapters
- Available for eyewash or eye/face wash



Model No.	Mfg. No.	Description	Wt. lbs.
SA422	OK-1	Eyewash Station	0.50
SA423	OK-2	Eye/Face Wash Station	0.75
SR376*	-	Replacement Dust Caps for SA422	-
SE620*	-	Replacement Dust Caps for SA423	-

* Sold per each

OPTI-KLENS® AERATED EYEWASH STATION

- Delivers a direct spray of gentle aerated water to the eyes in the event of a chemical, acid or caustic splash to the face
- Push paddle for easy activation
- Ball valve remains open until closed manually
- 10" stainless steel bowl
- 1/2" IPS and 1 1/4" IPS drain
- Softened flow heads with dust covers
- Wall mount
- Weight: 4 lbs.

Model No. SA402



SHOWERS & FALL PROTECTION

COMBINATION SHOWER/EYEWASH

Easy-to-install combination drench shower eyewash station should be located within 100 feet of hazardous areas, equipped with 1 1/4" IPS galvanized steel pipe, impact-resistant shower head and eyewash bowl. Stay open ball valves assure safe, hands-free operation. All units painted high visibility yellow and equipped with wall mount safety sign.

DRENCH SHOWER TESTER

- Heavy-duty tester provides a convenient way to comply with ANSI specifications for weekly testing on all drench showers - without getting wet
- 84" long, watertight funnel with weighted bottom directs water to a drain or bucket
- 8' telescoping aluminum handle
- Testing record card included




Model No.	Description	Wt. lbs.
SA415	Combination Shower	60
SC338	Drench Shower Tester	5



EMERGENCY SHOWER STATION MAT NO. 465

Use under emergency showers or eyewash stations to draw attention to the emergency equipment and to keep accident victims from slipping.

- 7/8" thick with drainage ports throughout, keeps employees safely above the overflow area as the hazardous chemicals are washed off
- High-traction design on the mats surface also provides safe footing
- Following the ANSI Z535.1-1998 standard for colour-coding, the mat effectively calls attention to the safety shower (red) or eyewash areas (green)
- Highly visible tiles designate the location of first aid and safety equipment, and the yellow borders denote caution
- Borders are 6" wide and have a gradual slope for easy access

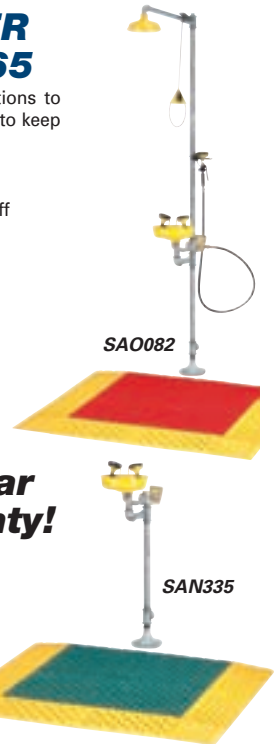

1-year warranty!



Model No.	W"	Dim. x L"	Colours
SAN335	30	x 36	Green
SAN336	30	x 48	Green
SAO082	30	x 36	Red
SAO083	30	x 48	Red

OVERHEAD SHOWERS

Drench showers provide fast drench of complete body in seconds. Hands-free ball valve activates immediately, 10" Impact resistant plastic shower head. Available for horizontal or vertical supply. SEI certified. Meets ANSI Z358.1 standards.



Model No.	Description	Wt. lbs.
SA414	Horizontal Supply	7
SA416	Vertical Supply	5



TITAN® CONTRACTOR'S HARNESSES

Titan™ full-body harnesses are made from lightweight durable polyester webbing for all day comfort and dependability.

- Fully adjustable design
- Sliding back D-ring
- Sub-pelvic strap
- Universal fit (other sizes available upon request)
- Colour: Orange
- Meets all applicable OSHA, ANSI and CSA requirements



Model No.	Mfg. No.	Side D-Rings	Shoulder Strap Buckles	Leg Strap Buckles	Chest Strap Buckle	CSA Group
SN064	T4000/UAK	No	Mating	Mating	Mating	A
SN065	T4007/UAK	Yes	Mating	Mating	Mating	A, P
SN066	T4500/UAK	No	Mating	Tongue	Mating	A
SN067	T4507/UAK	Yes	Mating	Tongue	Mating	A, P

TITAN® SHOCK-ABSORBING LANYARDS

Titan™ lanyards are made of lightweight, durable polyester webbing, 6' (1.8 m) length and locking snap hook for the harness.

Tubular built-in core style features a built-in woven inner core which smoothly expands to reduce fall arrest forces, while the outer jacket serves as a back-up web lanyard.

Standard length is 6'; also available in lengths from 4' to 10'. Locking snap hook - 3/4" gate opening.

Model No. SN069



B206

MILLER® MANYARD® SHOCK-ABSORBING LANYARDS

With 20 years of design refinement, the Miller® Manyard® shock-absorbing lanyards are unsurpassed in the market.

- Special woven shock-absorbing inner core reduces fall arrest forces
- Heavy-duty tubular outer jacket serves as a back-up web lanyard
- Unique warning flag provides visual proof that a lanyard has been involved in a fall and should be removed from service
- Harness connection: locking snap hook



Model No.	Mfg. No.	Number of leg	Anchorage Connection	Length'
SC980	216WLS/4FTYL	One	Locking Snap Hook	4
SC981	216WLS/5FTYL	One	Locking Snap Hook	5
SC982	216WLS/6FTYL	One	Locking Snap Hook	6
SC983	216WLS/8FTYL	One	Locking Snap Hook	8
SC984	219WRS/4FTYL	One	Locking Rebar Hook	4
SC985	219WRS/5FTYL	One	Locking Rebar Hook	5
SC986	219WRS/6FTYL	One	Locking Rebar Hook	6
SC987	219WRS/8FTYL	One	Locking Rebar Hook	8
SAH529	231WRS/6FTYL	Two	Locking Rebar Hook	6

MILLER® POSITIONING & RESTRAINT LANYARDS

Nylon rope lanyards are recommended for "work positioning" and "restraint" only. Harness connection: Locking snap hook.



Model No.	Mfg. No.	Anchorage Connection	Length'
SA012	201RLS-2/4FTWH	Locking Snap Hook	4
SA013	201RLS-2/6FTWH	Locking Snap Hook	6
SA014	201RLS-2/8FTWH	Locking Snap Hook	8
SD512	202RRS-2/4FTWH	Locking Rebar Hook	4
SD513	202RRS-2/6FTWH	Locking Rebar Hook	6
SD514	202RRS-2/8FTWH	Locking Rebar Hook	8

FIRST AID KITS & LOCKOUTS

REGULATION FIRST AID KITS

Regulation kits meet or exceed current requirements as stated in the Workman's Compensation Act in accordance with each province. Determine the kit size by the number of people it will service. Kits are made of plastic. Metal and refill kits are available. Inquire about deluxe kits. Saskatchewan First Aid Kits are deluxe.



Model No.	Material	No. of Employees
ALBERTA		
SN664	Plastic	1
SN665	Plastic	2 - 9
BRITISH COLUMBIA		
SD776	Plastic	Basic
SD777	Plastic	Level 1
NEW BRUNSWICK		
SAM361	Plastic	2-19
PRINCE EDWARD ISLAND		
SD826	Plastic	1 - 4
SD827	Plastic	5 - 15
SD828	Plastic	16 - 100
QUEBEC		
SD835	Plastic	1 - 10 (Vehicle)
SD836	Plastic	1 - 50
SD837	Metal	1 - 10 (Vehicle)
SD838	Metal	1 - 50

Model No.	No. of Material	Employees
SASKATCHEWAN DELUXE		
SD841	Plastic	1 - 9
SD842	Plastic	10 - 40
SD843	Plastic	40+
NEWFOUNDLAND & LABRADOR		
SD796	Plastic	1 - 5
SD797	Plastic	6 - 14
SD798	Plastic	15 - 200
NOVA SCOTIA		
SD812	Plastic	2 - 20
SD813	Plastic	21 - 50
ONTARIO		
SD818	Plastic	1 - 5
SD819	Plastic	6 - 15
SD820	Metal	1 - 5
SD821	Metal	6 - 15
SD822	Metal	16 - 200

Model No.	Material	No. of Employees
NORTHWEST TERRITORIES		
SD805	Plastic	1 - 4
MANITOBA		
SG512	Plastic	1 - 25

OVER 100 EMPLOYEES REQUIRES A FIRST AID ROOM

BURNFREE® BURNGEL™ & BURN DRESSINGS

Pain relieving gel is for use on all burns but is especially designed for minor burns including sunburns. Available in bottle or sachets. Burn dressings are constructed of a special, soft open-cell foam. They are non-adherent and will not shed threads, strands or fibres that could become embedded in a burn wound.

Model No.	Description	Size	Qty/Box
SD861	Bottle	4 oz.	1
SD862	Sachet	1/8 oz.	6
SD863	Sachet	1/8 oz.	25
SD864	Burn Dressing	4" x 4"	1
SD865	Burn Dressing	8" x 8"	1
SAJ502	Burn Dressing	12" x 12"	1



ROTATING ELECTRICAL PLUG LOCKOUTS

- Outward/inward rotation allows for easier installation and storage
- Unique outward rotation allows for easier installation in confined space applications
- Surrounds the electrical plug; protects against accidental reconnection
- Each size rotates into itself to fit effectively into safety tool boxes
- Tough, lightweight, dielectric Xenoy® thermoplastic bodies withstand chemicals; perform effectively in extreme conditions (temperature range -50°F (-46°C) to 350°F (177°C))
- Red lockout colour identifies the safety lockout application
- Complete with high-visibility permanent safety labels (English, French and Spanish)
- The SAL521 labels can be written on to identify the responsible person and then erased for the next job



SAL520



SAL521

Master Lock®

Model No.	Mfg. No.	For Electrical Plugs Sizes Up To
SAL520	487	2 1/4" Dia. x 3 1/4" w/Cord Dia. up to 3/4" (Most 110- and Many 220-Volt Plugs)
SAL521	488	3" Dia. x 6" w/Cord Dia. up to 3/4" (Most 220- and 550-Volt Plugs)

LABELED SNAP-ON HASPS

- Combines multiple-person lockout and tagout identification
- Features an easy-to-apply "snap-on" advantage with its spring-loaded locking arm
- Fits more lockout points than alternative rivet-hinge labeled lockout hasps
- Anodized aluminum and stainless steel construction for combined corrosion resistance and strength
- Up to 5 workers can apply their personal safety locks
- Complete with high-visibility permanent safety labels (English, French and Spanish) that can be written on to identify the responsible person and then erased for the next job
- Available in 9 different colours



Master Lock®

Model No.	Mfg. No.	Colour	Model No.	Mfg. No.	Colour
SAL541	427	Red	SAP998	427GRN	Green
SAP994	427BLK	Black	SAP999	427ORJ	Orange
SAP995	427BLU	Blue	SAQ001	427PRP	Purple
SAP996	427BRN	Brown	SAQ002	427YLW	Yellow
SAP997	427CLR	Clear/Silver	SAQ003	427AST	Assorted 6/pk