

DRUM LIFTERS

DRUM/OVERPACK LIFTERS

- A safe method of moving 45-gallon steel drums
- Design allows for quick, gentle loading. Drum stays upright during lift
- Low-profile clamp design on 45-gallon lifter lowers open (lid must be on) or closed head steel drums all the way to bottom of overpack
- 70-gallon overpack lifter picks up both 70-gallon steel overpack drums and 45-gallon steel drums
- Universal model **DA876** handles many lever-lock closure fibre drums typical steel drums and 45-gallon rimmed plastic drums
- Capacity: 1000 lbs.

| Model No. | Description | Wt. lbs. |
|-----------|----------------------------------|----------|
| DA224 | 45-gal. Lifter | 21 |
| DA225 | 70-gal. Overpack/45-gal. Lifter | 22 |
| DA876 | Universal Lifter | 25 |
| DC094 | Stainless Steel Universal Lifter | 25 |



HORIZONTAL DRUM LIFTING HOOKS

- Horizontally lifts 45-gal. steel drums, 34"- 36" long
- Alloy steel lifting ring, steel rods, malleable iron hooks
- Capacity: 1000 lbs.
- Weight: 5 lbs.

Model No. **DA164**

- Spark resistant lifting hook is made of bronze and copper for safe handling
- Capacity: 1000 lbs.
- Weight: 5 lbs.

Model No. **DA163**



FORK LIFT ATTACHMENT

- Converts any lift truck to a below-the-hook carrier
- 360° rotation safety hook for safe, easy lifting
- All steel construction
- Dimensions: 14" L x 31" W x 7" H
- Capacity: 1000 lbs.
- Wt.: 42 lbs.

Model No. **DA231**



SINGLE FORK HOOKS

- Convert forklift to a hoist in seconds
- Feature a safety latch and all-welded steel frame
- Safety yellow
- Available with fixed or swivel hook



| Fixed Hook Model No. | Swivel Hook Model No. | Work Load Limit, lbs. | Fork Pocket W" x H" | Hook Opening" | Wt. lbs. |
|----------------------|-----------------------|-----------------------|---------------------|---------------|----------|
| DA167 | DA688 | 3000 | 4 3/8 x 2 3/8 | 27/32 | 13 |
| DA168 | DA689 | 3000 | 5 3/8 x 2 3/8 | 27/32 | 15 |
| DA169 | DA690 | 3000 | 6 3/8 x 2 3/8 | 27/32 | 16 |

AUTO-GRIP DRUM LIFTER

- Easy, no-tilt lifting of rimmed steel drums
- Self-energizing: the heavier the load, the tighter the grip
- Attaches to any hoist, crane or forklift using single fork hook attachment
- Heavy-duty, annealed, ductile iron construction
- Large curved foot at bottom of stabilizing arm prevents drum damage
- Capacity: 3000 lbs.
- Wt.: 31 lbs.

Model No. **DA226**



AUTOMATIC VERTICAL DRUM LIFTER

- Lifts and transports closed steel drums easily and effectively
- Unit grips automatically; releases only when drum is set down
- Operator does not have to be at pick up or drop points
- 45-gallon model is available in standard steel or type 304 stainless steel construction
- Capacity: 1000 lbs.



| Model No. | Lifts Drum Size Gallons | Construction Material | Wt. lbs. |
|-----------|-------------------------|-----------------------|----------|
| DC091 | 30 | Steel | 45 |
| DA203 | 45 | Steel | 50 |
| DC092 | 45 | Stainless Steel | 50 |
| DC093 | 85 | Steel | 59 |



REINFORCED NYLON DRUM SLING

- Securely and economically lifts steel, plastic and fibre drums from 12" to 24" in diameter
- Ideal for use with a forklift truck
- Compact size of sling allows it to be stored in truck until it's needed
- Reduces drum damage which occurs when using steel handlers
- Steel ratchet tightens the reinforced nylon lifting belt around body of the barrel holding it securely in place
- 4" wide, double stitched carrying strap on the belt slips easily over the truck forks
- Capacity: 1000 lbs. • Wt.: 5 lbs.

Note: Open ratchet fully when installing sling on 45-gal. drums.


Model No. **DA208**



MULTI-PURPOSE OVERHEAD DRUM LIFTER WITH WRENCHES

- Simple three-arm design allows for safe lifting of closed head 30 to 55-gallon steel, plastic, and fiber drums with top lips
- Each removable arm also functions as a wrench for use on different drum plugs, faucets, and rim ring bolts.
- Lifts drums up to 800 lbs capacity
- Powder coat finish for durability
- Wt.: 20 lbs.

Model No. **DC095**



MANUAL VERTICAL DRUM LIFTER


- Allows raising and moving of closed-head 45-gallon steel drums
- 1 1/2" diameter lifting eye is mounted above 4 hot rolled steel supports
- Safety lock pin prevents accidental opening
- Attaches to overhead crane or hoist
- Dimensions: 23" W x 28 1/4" D x 13 1/2" H
- Capacity: 700 lbs.
- Wt.: 15 lbs.

Model No. **DA228**



LIFTING EQUIPMENT

Constructed of grade 80 alloy steel, these chain hooks are recommended for overhead lifting.

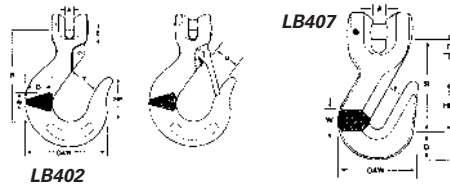

ALLOY STEEL HOOKS

CLEVIS SLING HOOKS WITH LATCH



| Model No. | Recom. Chain Inches | Dia. mm | Max. Working Load lbs. | R mm | T mm | U mm | A mm | E mm | D mm | W mm | HP mm | OAW mm | Wt. lbs. |
|-----------|---------------------|---------|------------------------|------|------|------|------|------|------|------|-------|--------|----------|
| LB402 | 9/32 | 7 | 4300 | 95 | 32 | 27 | 8 | 9 | 29 | 19 | 44 | 98 | 1.3 |
| LB404 | 1/2 | 13 | 15000 | 146 | 48 | 40 | 14 | 16 | 48 | 32 | 68 | 156 | 5.4 |
| LB405 | 5/8 | 16 | 22600 | 171 | 56 | 46 | 18 | 19 | 59 | 35 | 79 | 179 | 8.5 |
| LB406 | 3/4 | 20 | 35300 | 197 | 64 | 56 | 21 | 22 | 70 | 41 | 86 | 205 | 12.4 |

CLEVIS GRAB HOOKS

| Model No. | Recommended | | | Load Pin | | | | | | | | | | Wt. lbs. |
|-----------|--------------|---------|------------------------|----------|------|------|------|---------|------|------|-------|--------|-----|----------|
| | Chain Inches | Dia. mm | Max. Working Load lbs. | R mm | T mm | A mm | E mm | Dia. mm | D mm | W mm | HP mm | OAW mm | | |
| LB407 | 9/32 | 7 | 4300 | 60 | 10 | 8 | 9 | 10 | 21 | 16 | 32 | 51 | 0.5 | |
| LB408 | 3/8 | 10 | 8800 | 74 | 13 | 11 | 13 | 13 | 32 | 19 | 41 | 71 | 1.6 | |
| LB409 | 1/2 | 13 | 15000 | 94 | 17 | 14 | 16 | 16 | 38 | 24 | 51 | 89 | 2.6 | |
| LB410 | 5/8 | 16 | 22600 | 113 | 20 | 18 | 19 | 19 | 44 | 31 | 67 | 105 | 5.8 | |
| LB411 | 3/4 | 20 | 35300 | 130 | 25 | 21 | 22 | 22 | 54 | 35 | 83 | 124 | 8.8 | |

JIB BOOMS

- Converts fork lift trucks into mobile jib cranes for infinite variety of uses
- Fully adjustable booms reach out, pick-up, and move heavy long loads
- Makes fork lift more versatile
- Boom slips onto the forks and anchors to the truck with a safety chain
- Includes two adjustable hooks

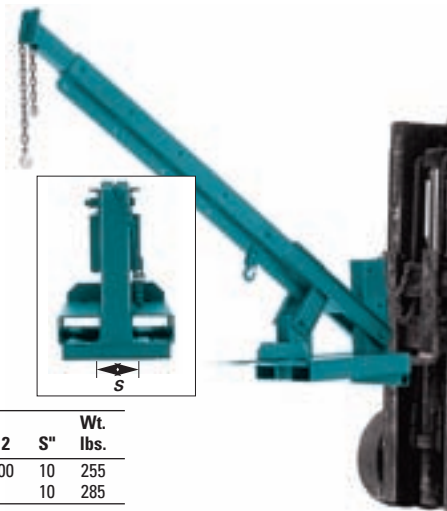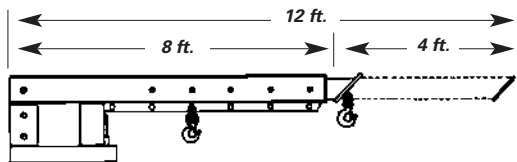

| Model No. | Boom Type | Fork Lift Cap. lbs. | Boom Cap. lbs. (Reach ft.) | | | | | | | Wt. lbs. |
|-----------|-----------|---------------------|----------------------------|------|------|------|------|------|----|----------|
| | | | 0-7 | 8 | 9 | 10 | 11 | 12 | S" | |
| LA188 | Fixed | 3000 | 1000 | 800 | 725 | 650 | 600 | 500 | 10 | 255 |
| LA187 | Elevating | 3000 | | | | | | | 10 | 285 |
| LA186 | Fixed | 8000 | 3000 | 2700 | 2400 | 2200 | 2000 | 1900 | 12 | 438 |
| LA185 | Elevating | 8000 | | | | | | | 12 | 483 |

F.O.B. Vaudreuil, Quebec.

Items are made to order and are non-returnable

HAND WINCHES


AUTOMATIC BRAKE WINCHES

- Zinc plated
- Self-activating automatic brake system to prevent heavy loads from falling when handle is released
- Positive holding action of brake system while raising & lowering loads provides needed control for safety
- Comfort grip handle for positive hold
- Double disc brake on LA692 and LA693
- Load-Lok automatic disc brake system on LB257 and LA691
- Cable pays out after load has been lowered, continued cranking on the winch allows cable remaining on drum to feed out automatically

| Model No. | Cap. lbs. | Gear Ratio | Hub Dia." | Reel Ft x | Cap. dia." | Handle Length" | Wt. lbs. |
|-----------|-----------|------------|-----------|-----------|------------|----------------|----------|
| LB257 | 600 | 1:1 | 1 1/4 | 85 x | 1/8 | 11 | 7.5 |
| LA691 | 1000 | 4.1:1 | 2 1/4 | 60 x | 7/32 | 11 | 8 |
| LA692 | 1500 | 5.1:1 | 2 1/2 | 88 x | 1/4 | 11 | 15 |
| LA693 | 2500 | 15.8:1 | 3 1/8 | 75 x | 5/16 | 11 | 24 |
| LA694 | 2000 | 4.1:1 | 1 1/2 | 100 x | 3/16 | 8 | 11 |
| LA695 | 3000 | 5.1:1 | 3 1/3 | 90 x | 1/4 | 10 | 31 |

WORM GEAR WINCHES (LA694, LA695)

- Self-activated brake mechanism holds load safely in place when cranking stops
- Double mesh worm gear train for quiet operation/optimum wear
- Bronze bushings extend life
- Rear frame reinforcing bar keeps frame straight
- Large diameter drum hubs protect steel cable from damage
- High carbon steel on drum gears last longer
- Large handle grip for easy cranking
- Model LA695 includes drive ring and 10" handle

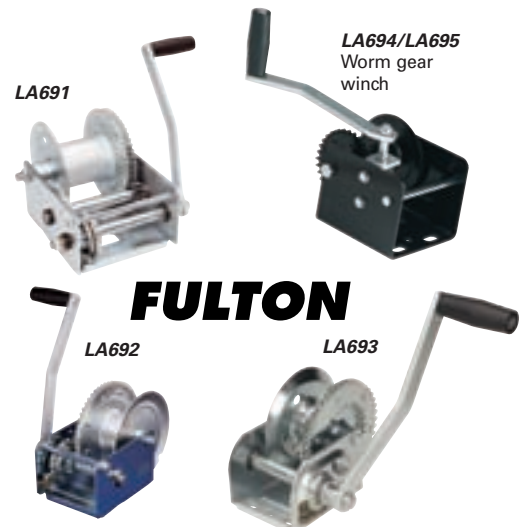

CHAIN HOOKS

All hooks are grade 40 with a self-coloured finish. Heat treated. **Not to be used for over head lifting.**



| Model No. | Size Dia." | Max. Working Load Limit lbs. |
|-----------|------------|------------------------------|
| LT275 | 1/4 | 2600 |
| LT276 | 5/16 | 3900 |

CLEVIS GRAB HOOK

| | | |
|-------|------|-------|
| LT273 | 5/16 | 3900 |
| LT274 | 3/8 | 5400 |
| LB389 | 5/8 | 11500 |

SLIP HOOK

| | | |
|-------|------|------|
| LT275 | 1/4 | 2600 |
| LT276 | 5/16 | 3900 |

LIFTING HOOKS

Highly secure industrial lifting hooks are manufactured of grade 100 alloy steel, which can be used in all applications. When used in conjunction with grade 80 or 100 alloy chain and fittings, assemblies may be used for overhead lifting.



| Model No. | Size Dia." | Max. Working Load Limit lbs. | Wt. lbs. |
|-----------|------------|------------------------------|----------|
| LT277 | 9/32 | 4300 | 1.2 |
| LT278 | 3/8 | 8800 | 2.7 |
| LT279 | 1/2 | 15000 | 5 |
| LT280 | 5/8 | 22600 | 9 |
| LT281 | 3/4 | 35300 | 14 |