

DRUM INSERTS & LIDS

ACCORDION INSERTS FOR 55-GALLON DRUMS

- Seamless insert constructed from FDA approved LDPE, average 15 mil thick
- Accordion pleat design adjusts to varying heights of reconditioned drums
- Formed lip grips chime of drum and stays in place during follower plate pumping



| Model No. | Wall Thickness | Qty /Case |
|-----------|----------------|-----------|
| DA110 | 15 mil | 20 |
| DA911 | 18 mil | 15 |
| DA912* | 15 mil | 20 |

* Anti-static

INSERTS FOR 5-GALLON STEEL PAILS

- Constructed from FDA approved polyethylene
- Straight-sided inserts for steel pails are ideal for small batch mixing
- Choose from pliable LDPE or solvent-resistant HDPE
- Available in anti-static
- Available in polypropylene for hot-fill applications to 300°F
- Model DA945 used for hot-fill applications



| Model No. | Wall Thickness | Material | Qty /Case |
|-----------|----------------|---------------|-----------|
| DA100 | 15 mil | LDPE | 100 |
| DC013 | 15 mil | HDPE | 100 |
| DA945 | 15 mil | Polypropylene | 100 |

STRAIGHT-SIDED INSERTS FOR 16, 30 AND 55-GALLON OPEN HEAD STEEL DRUMS

- Constructed from FDA approved LDPE,
- Smooth wall inserts withstand mixing and pumping applications
- Available in anti-static
- Available in polypropylene for hot-fill applications to 440°F
- Model DC045 used for hot-fill applications



| Model No. | Wall Thickness | Drum Gal. | Qty /Case |
|-----------|----------------|-----------|-----------|
| DC046 | 15 mil | 16 | 15 |
| DA868 | 15 mil | 30 | 25 |
| DA913 | 15 mil | 55 | 20 |
| DA914 | 18 mil | 55 | 15 |
| DA915 | 24 mil | 55 | 15 |
| DC045 | 15 mil | 55 | 10 |

5-GALLON PLASTIC PAIL INSERTS

- Seamless 14" tall tapered insert provides custom fit for plastic pail
- Average 15-mil thick FDA approved LDPE or HDPE



| Model No. | Material | Qty /Case |
|-----------|----------|-----------|
| DB017 | HDPE | 100 |
| DC048 | LDPE | 100 |

FUSIBLE LINK SELF-CLOSING DRUM COVER

- Converts open top 45-gallon steel drums into fire-safe receptacles for combustible trash
- Replaceable fusible link assembly inside the cover melts at 160°F, automatically slamming the cover shut if a fire occurs in the drum
- Steel construction; solvent resistant, red baked-on enamel finish
- Fits drums from 22 1/2" to 22 3/4" in diameter
- FM approved
- Wt.: 16 lbs.

Model No. DA097



ELASTICIZED DUST CAPS FOR 5, 30 & 55-GALLON CONTAINERS

- Clear 4 mil LDPE caps with elasticized band for easy installation
- Available in anti-static

| Model No. | Drum Size | Model No. | Drum Size |
|-----------|-----------|-----------|-----------|
| DA106 | 5 gal. | DA930* | 30 gal. |
| DA928* | 5 gal. | DA107 | 45 gal. |
| DA929 | 30 gal. | DA931* | 45 gal. |

*Anti-static models



PROTECTIVE 55-GALLON DRUM LIDS

- Tough average 40-mil thick LDPE lids protect steel drum tops from corrosion and contamination
- Available for open head and tight head drums
- Available in clear to view labelling on drum top

| Model No. | Description |
|-----------|----------------------------|
| DA116 | Open Head Drum, Black Lid |
| DA117 | Open Head Drum, Clear Lid |
| DA118 | Tight Head Drum, Black Lid |
| DA119 | Tight Head Drum, Clear Lid |



HORIZONTAL VENTS

- FM approved vents are for use with drums in the horizontal pouring position
- Automatically relieves pressure at 5 PSI
- Flame arrestor protects contents
- Manual vacuum relief by lifting and rotating valve stem
- Maximum flow of 220 CFM at 20 PSI
- Fits 2" NPT bung in steel and plastic drums
- Use **brass vent** for petroleum based applications
- Use **stainless steel vent** for corrosives and general solvents



| Model No. | Description | Wt. lbs. |
|-----------|----------------------|----------|
| DA604 | Brass vent | 1.0 |
| DA608 | Stainless steel vent | 1.0 |

VERTICAL VENTS

- FM approved vents are for use with drums in the upright position
- Valve automatically opens to relieve internal pressure at 5 PSI
- Automatic vacuum relief permits 4 GPM flow through 3/4" faucet
- Fits 2" NPT bung opening



| Model No. | Description | Application | Wt. lbs. |
|-----------|---|----------------------|----------|
| DA607 | Brass vent | Petroleum-based | 0.5 |
| DA605 | Non-metallic vent, cad-plated flame arrestor | Petroleum-based | 0.5 |
| DA606 | Non-metallic vent, stainless steel flame arrestor | Chlorinated solvents | 1.0 |

DRUM ACCESSORIES

POLY-DRUM TOPPER™

Snaps directly onto any 45-gallon open or closed-head drum to keep out debris and protect drum tops. Exterior dimensions: 25 1/4" dia. x 3 3/4" H



| Model No. | Mfg. No. | Description | Wt. lbs. |
|-----------|----------|-------------------|----------|
| SAQ193 | 3065-BK | Poly-Drum Topper™ | 1.5 |

DRUM-UP™ TRAYS

THE INCIDENTAL SPILL SOLUTION!

- Catch liquid before it reaches the floor, reducing the risk of slip and fall injuries
- Ideal for use as a drum pumping station
- Secondary containment unit features a unique geometric design covering more floor area
- Drain hole makes emptying easy

DRUMS-UP™

- Control nuisance spills from drums with a 19 1/2 US gallon capacity
- Contains drips for containers up to 45 gallons

DRUMS-UP JR™

- Containment for 16 to 30 US gallon drums and 5-gallon pails
- 7 1/2 US gallon capacity



DA104



SD361



| Model No. | Mfg. No. | Description | Dimensions | | | Wt. lbs. |
|-----------|----------|---------------|------------|---|-------|----------|
| | | | Dia" | x | H" | |
| DA104 | 8091-YE | Drums-Up™ | 34 | x | 7 1/4 | 12 |
| SD361 | 8200-YE | Drums-Up Jr.™ | 21 1/2 | x | 7 1/2 | 4 |

SAFETY DRUM FUNNELS

- Suitable for handling flammables, minimize potentially dangerous spills
- Large 10 3/4" mouth provides quick dumping
- Steel construction with 6" flame arrester for the DA102 and 32" flame arrester for the DA101
- Hinged cover with fusible link reduces spread of vapours
- 2" NPS
- FM approved




| Model No. | Description | Wt. lbs. |
|-----------|--------------------|----------|
| DA101 | 32" flame arrester | 12 |
| DA102 | 6" flame arrester | 12 |



B110

UNIVERSAL POLY-DRUM FUNNEL™

- Patented scalloped design, high sidewall and bung fitting holders
- For use with 30 and 55-gallon (US) drums
- Funnel's nest for compact shipment
- Non-sparking safety bung closure with flame arrester for use with flammable liquids
- Optional cover keeps the weather out
- Dimensions: Exterior - 26" dia. x 5 1/2" H; Interior - 22" dia. x 4" H

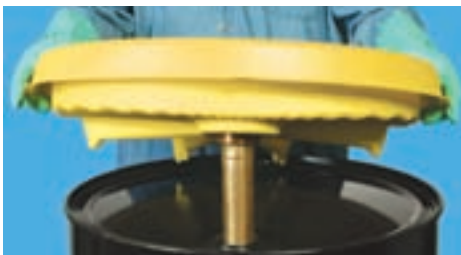

SAH566

| Model No. | Description | Wt. lbs. |
|-----------|---------------|----------|
| SAH565 | Funnel | 3 |
| SAH566 | Safety Funnel | 5 |
| SAH567 | Funnel Cover | 3 |



POLY-PAIL FUNNEL™

Mounts to 3 1/2, 5 and 6-gallon tight-head pails. Also fits open top pails with 12" dia. Optional Poly-Pail Funnel™ cover available.

POLY-PAIL FUNNEL™

- Exterior Dimensions: 9 1/4" top diameter x 11" bottom diameter x 2 3/4" H
- Interior Dimensions: 8 1/2" x 2 3/8" side wall height

POLY-PAIL FUNNEL™ COVER

- Exterior Dimensions: 9 3/8" diameter x 2 3/8" H



| Model No. | Description | Wt. lbs. |
|-----------|-------------------------|----------|
| DA098 | Poly-Pail Funnel™ | 2 |
| SG291 | Poly-Pail Funnel™ Cover | 3 |

SAFETY FUNNEL WITH VENT

- Provides safe waste solvent disposal due to automatic pressure and vacuum relief
- 9" diameter polyethylene funnel comes with brass safety vent and 6" flame arrester
- Cap comes with safety chain to prevent loss
- 2" NPS
- FM approved
- Wt.: 4 lbs.

Model No. DA103

