

# STEP STOOLS, STANDS & LADDERS

## STEP STOOLS

### KIK-STEP

- Extra heavy-duty steel
- Comes with a double platform with non-slip rubber tread
- Spring-loaded casters retract under slight pressure, forcing base to the floor
- 11" diameter upper platform and 13 1/2" diameter lower platform
- 15 5/8" diameter base has an all-around protective bumper
- 14" overall height
- Wt.: 10 lbs.
- Colour: Black

Model No. OC664



### STEP STOOL

- Tough one piece poly construction with anti-skid bottom
- Threaded top and expanded step
- 16" diameter base provides added stability
- Glides easily on retractable rubber casters
- 13" overall height
- Capacity: 300 lbs.
- Wt.: 7 lbs.

OA300



Model No.	Mfg. No.	Colour
OA299	2523BL	Black
OA300	2523BE	Beige

### FOLDABLE STEP-STOOL

- Slip resistant surfaces on steps and foot pads
- Stands upright when folded and requires minimum space for storage
- Easy to clean and resistant to dents and rust
- Capacity: 300 lbs.

Model No. MH866



## DIXIE STEP STOOLS

- Durable, non-corrosive, 500-lbs. capacity polyethylene construction
- Two, three and four step models have rear opening to access storage compartments
- Hand holes and lightweight combine for easy manoeuvrability
- All models include rubber feet and non-skid tape surface
- Colour: Safety yellow for visibility

### TRIPLE STEP

Dimensions: 32" L x 22" W x 30" H  
Weight: 33 lbs.

Model No. MK778



### QUAD STEP WITH CASTERS

Dimensions: 45" L x 25" W x 69.5" H  
Weight: 53 lbs.


Model No. MK779



### SINGLE STEP

Dimensions: 18" L x 12" W x 12" H  
Weight: 10 lbs.


Model No. MK776



### DOUBLE STEP

Dimensions: 22" L x 21" W x 20" H  
Weight: 22 lbs.

Model No. MK777



Dixie Poly Drum Corp

## STEP STANDS

- Rugged all welded construction
- Rolling stands come with spring-loaded casters
- Dimensions: 16" D x 12" H
- Capacity: 300 lbs.
- Colour: Kleton blue



MH228



MH225

### PLATFORM STANDS

Model No.	Width"	Wt. lbs.
MH228	20	11
MH229	24	13
MH230	32	16

### ROLLING STANDS

Model No.	Width"	Wt. lbs.
MH225	20	17
MH226	24	19
MH227	32	22

## HEAVY-DUTY ALUMINUM SAWHORSE/STEP

- Engineered to allow for convenient mixing of sizes in plank applications
- Durable extruded aluminum steps and side rails, serrated for strength and safety
- Trestle design allows safe access from either side
- J-shaped spreaders for easy set-up and storage
- Heavy-duty rubber safety shoes



Model No.	Height'	Open Height"	Base Width"	Base Depth"	Weight lbs.
VC010	2	23	32	24.5	10
VC011	3	35	33	32	14
VC012	4	47.5	34.5	34.5	19

## 4' ALUMINUM LIGHT-DUTY PLATFORM LADDER

- 1" tubular construction makes this ladder light weight and compact for storage
- Handrail with comfort foam grip
- Fold-down utility tray for paint, tools, etc
- Non-marring, slip-resistant feet
- Overall height: - closed: 55"  
- open: 51"
- Overall platform height: 22 1/2"
- Approx. weight: 8 lbs.


Model No. TJZ869




# FIBERGLASS LADDERS

## CHOOSE THE RIGHT LADDER IN 4 EASY STEPS ...

### 1. WHAT STYLE?



**Stepladder**  
Perfect for projects requiring a smaller reach.



**Multi-Way Ladder**  
Can be used as a stepladder, Trestle ladder, Stairway ladder or Extension Ladder.



**Extension Ladder**  
Ideal for projects requiring greater height.

### 2. WHAT HEIGHT?

#### Stepladder

Max. Height You Want to Reach*	Buy This Size
7'	4'
8'	5'
9'	6'
10'	7'
11'	8'
12'	10'
14'	12'
16'	14'
18'	16'
20'	18'
22', 24'	20'

\*Assumes a 5' 6" person with a vertical 12" reach.

#### Extension Ladder


Height of Top Support Point	Buy This Size*
9' max.	16'
9' to 13'	20'
13' to 17'	24'
17' to 21'	28'
21' to 25'	32'
25' to 28'	36'
28' to 31'	40'

\*Reflects section overlap, ladder angle.

### 3. WHAT MATERIAL?


#### Aluminum

- Lightweight
- Strong
- Resists corrosion



#### Fiberglass

- Strong and durable
- Safe for work with or near electricity
- Resists corrosion



### 4. WHAT LOAD CAPACITY?

#### Formula:

Your Weight



Load Capacity



#### Material Weight

Typically Add:

75 lbs. For Heavy-Duty Projects  
50 lbs. For Light-Duty Projects



200 lbs.

CSA Grade 3 Household

225 lbs.

CSA Grade 2 Tradesman and Farm

250 lbs.

CSA Grade 1 Construction and Industrial

300 lbs.

Construction and Industrial meets ANSI Type1A, Extra Heavy Duty

375 lbs.

Construction and Industrial meets ANSI Type1AA, Special Duty

## THE "BRUTE" STEPLADDERS

### (6800 SERIES)

CSA certified grade 1

ANSI approved type 1a - 375 lbs. Load Rating

- Designed for the most demanding industrial applications
- Durable non-conductive "C" channel side rails in high-visibility safety yellow
- Features slip-resistant serrated aluminum steps
- Tough moulded copolymer top
- Inside spreader arms, heavy-duty rubber safety shoes and unique solid triangular step braces for extra durability



Model No.	Nominal Height'	Base Width"	Spread"	Wt. lbs.
MF561	4	18	31	18
MF562	6	21	43	24
MF563	8	23	55	33
MF564	10	26	67	39
MF565	12	28	78	50



## EXTRA HEAVY-DUTY STEPLADDERS

### (6900 SERIES)

CSA certified grade 1

ANSI approved type 1a - 300 lbs. Load Rating

- Durable non-conductive "C" channel side rails in high visibility safety yellow
- Slip-resistant serrated aluminum steps
- Heavy-duty rubber safety shoes
- Also comes with a tough moulded copolymer top and J-style spreader arms



Model No.	Nominal Height'	Base Width"	Spread"	Wt. lbs.
MF606	3	19	23	12
MF607	4	20	28	15
MF608	5	21	34	18
MF609	6	23	39	21
MF610	7	24	44	24
MF611	8	25	50	28
MF612	10	28	61	35
MF613	12	31	74	42



## HEAVY DUTY FIBREGLASS "GRATE" STEPLADDER

### (5900 SERIES)

CSA certified grade 1

ANSI approved 1A - 300 lbs. Load Rating

- Front and rear stabilizer feet provide safe surface contact for use on grated floors
- Durable non-conductive "C" channel side rails in high visibility safety yellow
- Slip-resistant serrated aluminum steps
- Stabilizers feature full serrated rubber shoes
- Rust-resistant coated steel braces front and rear
- Horizontal braces



Model No.	Nominal Height'	Open Height"	Highest Standing Point"	Base Width"	Base Depth"	Wt. lbs.
VC051	6	68	45	35	39	27
VC052	8	90	67	37	50	35
VC053	10	113	90	40	61	44
VC054	12	137	114	43	74	59



## PLATFORM STEPLADDERS

### (6500 SERIES)

CSA certified grade 1

ANSI approved type 1A - 300 lbs. load rating

- Ideal for all types of fixed height work
- Durable non-conductive "C" channel side rails in high visibility safety yellow
- Slip resistant serrated aluminum steps and platform
- Features a platform size of 14" x 18", J-style spreader arms and heavy-duty rubber safety shoes



Model No.	Nominal Height'	Platform Height"	Base Width"	Spread"	Wt. lbs.
MF411	6	46	24	42	25
MF412	8	68	26	53	33
MF413	10	92	30	67	41



# FIBERGLASS LADDERS

## HEAVY-DUTY STEPLADDERS

(6400 SERIES)



CSA Certified Grade 1

ANSI Approved Type 1A - 300 lbs. Load Rating

- Durable non-conductive "c" channel side rails in high viz safety yellow
- Slip-resistant serrated aluminum steps, moulded copolymer top, widened flare for greater stability
- Inside spreader arm with wrap-around brackets for added strength
- Double bracing on bottom steps
- Full rear horizontal braces every 12", added front steps K brace
- Heavy duty rubber safety shoes

Model No.	Nominal Height'	Base Width"	Spread"	Wt. lbs.
MD487	3	19	23	12
MD488	4	20	28	16
MD489	5	21	34	19
MD490	6	23	39	22
MD491	8	25	50	30
MD492	10	28	61	36
MD493	12	31	74	45



## HEAVY-DUTY FIBREGLASS STEPLADDERS

(6300 SERIES)

CSA Certified Grade 1.

ANSI Approved Type 1 - 250 lbs. Load Rating

- Super tough moulded copolymer top
- Strong non-conductive orange "C" channel side rails
- Slip-resistant serrated aluminum steps
- Widened flare for greater stability
- Black ABS, high impact, non-marking end caps
- Heavy-duty safety rubber shoes



Model No.	Max Open Height'	Highest Length"	Standing Height"	Base Width"	Base Depth"	Wt. lbs.
VC023	4	46	23	20	28	17
VC024	5	57	34	21	34	18
VC025	6	68	45	23	39	20
VC026	7	79	56	24	44	23
VC027	8	90	67	25	50	26



## SINGLE & EXTENSION LADDERS

(6200 SERIES)



CSA Certified Grade 1

ANSI Approved Type 1A - 300 lbs. Load Rating

- Durable non-conductive "C" channel side rails in high visibility safety yellow
- Riveted rung rail design maintains continuous strength of fibres
- Mounted slide guide
- Pulley keeps rope away from climber's feet & eliminates need for cross-bar
- Features exclusive 1 piece foot assembly with spur wheel and heavy-duty spring loaded die cast rung lock

### SINGLE SECTION STRAIGHT (6100 SERIES)

Model No.	Length'	Width"	Wt. lbs.
MF380	8	17 3/8	18
MF381	10	17 3/8	21
MF382	12	17 3/8	24
MF383	14	17 3/8	28
MF384	16	17 3/8	32

### 2 SECTION EXTENSION (6200 SERIES)

Model No.	Length'	Working Length'	Width"	Wt. lbs.
MF405	16	13	17 3/8	38
MF406	20	17	17 3/8	44
MF407	22	19	17 3/8	48
MF408	24	21	17 3/8	52
MF409	28	25	17 3/8	59
MF410	32	28	17 3/8	66

### D-RUNG

Model No.	Length'	Working Length'	Width"	Wt. lbs.
MF385	16	13	17 3/8	38
MF386	20	17	17 3/8	44
MF387	22	19	17 3/8	48
MF388	24	21	17 3/8	52
MF389	28	25	17 3/8	59
MF390	32	28	17 3/8	66
MF391	36	32	19	96
MF392	40	35	19	106



## TWO-WAY STEPLADDERS

(6600 SERIES)


CSA Certified Grade 1

ANSI Approved Type 1A - 300 lbs. Load Rating

- Double front construction allows access from either side
- Durable non-conductive "C" channel side rails in high visibility safety yellow
- Extra thick top brackets for greater stability
- Slip-resistant serrated aluminum steps, J-style spreader arms and heavy-duty rubber safety shoe



Model No.	Nominal Height'	Base Width"	Spread"	Wt. lbs.
MF414	6	23	60	26
MF415	8	25	75	36
MF416	10	28	92	46

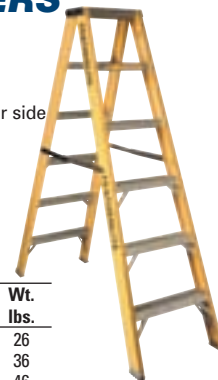

## MEDIUM-DUTY FIBREGLASS STEPLADDERS

(5800 SERIES)

CSA Certified Grade 2

ANSI Approved Type 2 - 225 lbs. Load Rating

- Super tough moulded copolymer top
- Durable non conductive "C" channel side rails in high visibility safety red
- Slip-resistant serrated aluminum steps
- Heavy-duty safety rubber shoes



Model No.	Open Height'	Highest Height"	Standing Height"	Base Width"	Base Depth"	Wt. lbs.
VC028	4	45	23"	18	30	12
VC029	5	57	34"	19 1/2	35	15
VC030	6	68	45"	30 3/4	40	18



## HEAVY DUTY FIBERGLASS EXTENSION LADDERS

(6300 SERIES)

CSA Certified Grade 1

ANSI Approved Type 1- 250 lbs. Load Rating


- Durable non-conductive "C" channel side rails in high visibility safety orange
- Rung through rail design
- Heavy-duty serrated "D" rungs prevent slipping for safe and sure climbing
- Black ABS, high impact, non-marking end caps
- Heavy-duty spring loaded rung locks
- Extra heavy-duty swivel feet with ice pick



Model No.	Height'	Max Open L'	Base section Outside Width"	Inside Width"	Ply section Outside Width"	Inside Width"	Weight Lbs.
VC013	16	13	17	14 5/8	16 1/2	14 1/4	31
VC014	20	17	17	14 5/8	16 1/2	14 1/4	36
VC015	24	21	17	14 5/8	16 1/2	14 1/4	43



## REPLACEMENT PARTS/ACCESSORIES

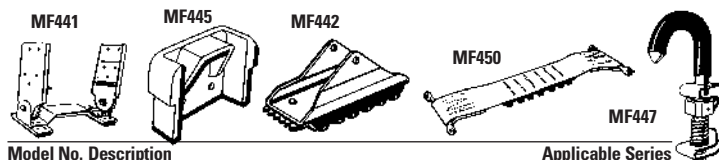

Model No.	Description	Applicable Series
MF436	Step Ladder Safety Feet - 4/kit	6400, 6500
MF437	Step Ladder Safety Feet - 4/kit	6600
MF439	Copolymer Top	6400, 6800, 6900
MF441	Extension and Straight Ladder Safety Feet (Standard 1 piece assembly)	6100, 6200
MF442	Extension and Straight Ladder Safety Feet (Optional duo feet) - 2/kit	6100, 6200
MF445	Extension Ladder End Caps - 4/kit	6100, 6200
MF447	Single Cable Hook	6100, 6200
MF449	Pole Strap	6200



# ALUMINUM LADDERS

## TWO-WAY STEPLADDERS

### (4600 SERIES)

CSA Certified Grade 1

ANSI Approved Type 1A - 300 lbs. Load Rating

- Double-front construction allows access from either side
- 3 1/2" serrated steps and side rails
- Solid triangular step braces provide rigidity
- Features extra thick top brackets for greater stability; "J" shape spreader arms and heavy-duty rubber safety shoes. 

Model No.	Nominal Height'	Base Width"	Spread"	Wt. lbs.
MF399	6	23	56	25
MF400	8	26	73	32
MF401	10	29	89	41




## PLATFORM STEPLADDERS

### (4500 SERIES)

CSA Certified Grade 1

ANSI Approved Type 1A - 300 lbs. Load Rating

- Ideal for fixed height work
- 1/2" serrated steps and side rails
- Solid triangular step braces provide rigidity
- Features slip resistant serrated platform 14" x 18", "J" shape spreader arms and heavy-duty rubber safety shoes 

Model No.	Nominal Height'	Platform Height"	Base Width"	Spread"	Wt. lbs.
MF393	6	46	24	42	22
MF394	8	69	27	54	28
MF395	10	92	31	65	35
MF396	12	115	34	78	43
MF397	14	136	36	87	52
MF398	16	158	39	102	60




## HEAVY-DUTY ALUMINUM STRAIGHT LADDERS

### (7100 SERIES)

CSA Certified Grade 1

ANSI Approved Type 1 - 250 lbs. Load Rating

- Heavy-duty "C" channel construction
- Side rails: 2 1/2" x 1" for straights up to 14'
- Side rails: 3" x 1" for straights up to 16' and up
- Heavy-duty serrated "D" rungs prevent slipping for safe and sure climbing
- Black ABS, high impact, non-marking end caps
- Heavy-duty safety shoes 

Model No.	Outside H'	Outside W"	Inside W"	Wt. lbs.
VC016	8	16 3/4	14 5/8	10
VC017	10	16 3/4	14 5/8	13
VC018	12	16 3/4	14 5/8	15
VC019	14	16 3/4	14 5/8	18
VC020	16	16 3/4	14 5/8	23
VC021	18	16 3/4	14 5/8	27
VC022	20	16 3/4	14 5/8	29




## INDUSTRIAL STEPLADDERS

### (4400 SERIES)

CSA Certified Grade 1

ANSI Approved Type 1A - 300 lbs. Load Rating

- 3 1/2" serrated steps and side rails
- Solid triangular step braces
- Mould copolymer top and pail tray heavy-duty hinged
- Rubber safety shoes 

Model No.	Nominal Height'	Base Width"	Spread"	Wt. lbs.
MA640	4	20	29	14
MA641	6	23	41	20
MA642	8	26	54	26
MA643	10	29	66	33
MA644	12	32	78	41
MA645	14	35	88	51
MA646	16	38	102	59




## MEDIUM-DUTY ALUMINUM STEP LADDERS

### (2400 SERIES)

CSA Certified grade 2

ANSI Approved type 2 - 225 lbs. Load Rating

- Super tough moulded copolymer utility top
- Durable yet light-weight extruded side rails
- 3" slip-resistant serrated steps
- J-shaped spreader arms
- Heavy-duty rubber safety shoes 

Model No.	Nominal Height'	Open Height"	Highest Standing Height"	Base Width"	Base Depth"	Wt. lbs.
MF063	4	45	24	18	31	9
MF064	6	67	45	21	44	13
MF065	8	90	67	23	56	19



## EXTRA HEAVY-DUTY ALUMINUM EXTENSION/STRAIGHT

### (4100 / 4200D SERIES)

CSA Certified Grade 1

ANSI Approved Type 1A - 300 lbs. Load Rating

- Rigid box section side rails, unequalled for strength and durability
- Side-mounted rope pulley and slide guide system keeps rope clear of climbers feet and allows easy raising (only on 4200D Series)
- Yellow ABS, high impact non-marring end caps
- Premium heavy-duty rung locks (Only 4200D Series)
- Slip-resistant serrated "D" rungs for safe climbing and comfort (round rung on 4100 Series)
- Heavy-duty ribbed swivel feet with ice pick



### SINGLE LADDERS (4100 SERIES)

Model No.	Nominal Length'	Working Length'	Width"	Wt. lbs.
MD506	8	-	14 5/8	13
MD507	10	-	14 5/8	16
MD508	12	-	14 5/8	19
MD509	14	-	14 5/8	22
MD510	16	-	14 5/8	25
MD511	18	-	14 5/8	28
MD512	20	-	14 5/8	31
MD513	22	-	16	41
MD514	24	-	16	44

### EXTENSION LADDERS (4200D)

Model No.	Working Length'	Width"	Wt. lbs.
VC033	16	13	29
VC034	20	17	37
VC035	24	21	44
VC036	28	25	50
VC037	32	29	69
VC038	36	32	78
VC039	40	35	86
VC040	44	39	94


Series 4200D

Series 4100



## REPLACEMENT PARTS/ACCESSORIES

MF443/MF444



MF440



MF434



Model No.	Description	Applicable Series
MF434	Step Ladder Safety Feet - 4/kit	4400, 4500
MF435	Step Ladder Safety Feet - 4/kit	4600
MF438	Pail Tray	4400
MF439	Copolymer Top	4400
MF440	Extension and Straight Ladder Safety Feet - 2/kit	4100, 4200
MF443	Extension Ladder End Caps - 4/kit (16' to 32')	4200
MF444	Extension Ladder End Caps - 4/kit (36' to 60')	4200