# STEP STOOLS, STANDS & LADDERS



- Durable extruded aluminum steps and
- side rails, serrated for strength and safety Trestle design allows safe access from either side
- J-shaped spreaders for easy set-up and storage
- Heavy-duty rubber safety shoes

### FEATHERLITE

Model		Open	Base	Base	Weight
No.	Height'	Height"	Width"	Depth"	lbs.
VC010	2	23	32	24.5	10
VC011	3	35	33	32	14
VC012	4	47.5	34.5	34.5	19

### **B68**

20341E

### 1" tubular construction makes this ladder light weight and compact for storage

- Handrail with comfort foam grip
- Fold-down utility tray for paint, tools, etc
- Non-marring, slip-resistant feet
- Overall height: closed: 55"
- open: 51"
- Overall platform height: 22 1/2 Approx. weight: 8 lbs.
- Model No. TJZ869




## LADDERS

### MULTI-PURPOSE JAWS™ TELESCOPIC LADDER

#### CSA APPROVED GRADE 1

- ANSI APPROVED TYPE 1AA 375 LBS. LOAD RATING
- Easily folds for storage or transport, compact + multifonctional
- · Flared ends with slip-resistant feet provide superior stability in any position
- · Polymer rung locks are virtually indestructible
- Extra deep side rails make the Jaws™ stiffer and stronger • Mechanical interlocking tooth hinges for superior strength and 5 locking positions

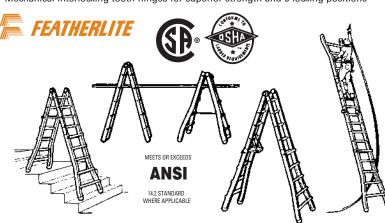

#### HIGH-PERFORMANCE TELESCOPING CLIMBING SYSTEM

Model No.	Folded Height	Extension Range'	Stepladder Range'	Scaffold Height'	Wt. Ibs.
MA740	4 '9"	9 to 15	4 1/2 to 7 1/2	1 to 4	36
MA741	5' 9"	11 to 19	5 1/2 to 9 1/2	1 to 5	41
MA742	6' 9"	13 to 23	6 1/2 to 11 1/2	1 to 6	50

### **HEAVY-DUTY & EXTRA HEAVY-DUTY ARTICULATING LADDERS**

CSA Certified Grade 1 - 250 lbs. Load Rating (MF538 and MF539) ANSI Approved Type 1 - 250 lbs. Load Rating (MF538) ANSI Approved Type 1A - 300 lbs. Load Rating (MF539)

- Versatile tool for wide variety of industrial/commercial jobs
- Converts easily from straight ladder to stepladder or scaffolding unit

## FEATHERLITE

Model No.	Straight Ladder Length'	Stepladder Height'	Scaffold Height'	Wt. Ibs.
MF538	12	6	3	23
MF539	16	8	4	46

### **MULTIPLE APPLICATIONS**



### STOP-STEP LADDERS

- Stops still when you step on it . Gives 18" to 54" of firm footing
- 1" square high tensile aluminum struts, frames and braces
- Heavy-gauge extruded aluminum 16" x 8" cross steps with 9" raise
- Long-lasting 1 5/8" retractable casters allow rubber base cups to grip floor 10 year limited warranty · Colour: Beige
- Download rating: 300 lbs. OSHA compliant
- Shipped kno

ocked	down	

Model	Number	Top Step	0ve	Overall Dimensions				
No.	of steps	Height"	W"	х	D"	х	Η"	lbs.
STOP-S	TEP							
MD623	2	18	21	Х	19 3/4	х	22 3/4	16
MD624	3	27	21	х	26 3/4	х	31 3/4	22
MD625	4	36	22 3/4	х	33 1/2	х	40 3/4	34
STOP-S	TEP W/DC	<b>UBLE HAND</b>	RAIL					
MD626	3	27	21	х	26 3/4	Х	56 1/2	32
MD627	4	36	23 3/4	х	33 1/2	х	65 1/2	39
MD628	5	45	25 1/4	х	40 1/2	х	74 1/2	50
MD629	6	54	26 1/4	х	47 1/4	х	83 1/2	64



# **ROLLING LADDERS**

### **ROLLING SAFETY LADDERS**







- · Ideal wherever there is a need to reach bulky materials
- · Roll easily into position and lock firmly to the floor for maximum safety
- · 2 to 6-step ladders operate on spring-loaded casters
- Casters retract under operator's weight, rubber feet drop down
- First step on all 8 to 16-step ladders activates the floor locking mechanism (step off and kick release to make the ladder mobile)
- · Non-clogging slip-resistant steel steps
- · Frame is rugged welded 1" round steel tubing
- · 8 to 16-step ladders shipped knocked down, easily assembled

Number	Model	Platform	Overall	Platform		Base	Wt.
of Steps	No.	Height"	Height"	Size"	W"	x D"	lbs.
WITHOUT	HANDRAILS						
2	MA612	19	19	22 x 16	24	x 26	32
3	MA613	28	28	22 x 16	24	x 30	42
4	MH279	37	37	22 x 16	24	x 37	52
5	MA615	46	46	22 x 16	24	x 41	61
WITH HAN	IDRAILS						
4	MA614*	37	78	22 x 16	30	x 36	78
5	MA616*	46	87	22 x 16	30	x 46	89
6	MA617*	55	95	22 x 16	30	x 51	100
8	MA622	72	113	30 x 16	38	x 60	180
10	MA623	89	130	30 x 16	38	x 72	230
12	MA624	109	149	30 x 16	38	x 80	250
14	MA625	128	167	30 x 16	38	x 93	275
16	MA626	144	185	30 x 16	38	x 104	305

\* Only front casters are spring loaded.

### **MECHANICS/MAINTENANCE ROLLING LADDERS**

- · Double-straddle base puts worker in close proximity for hard-to-reach jobs
- Tilt and roll wheelbarrow mobility allows easy movement over rough surfaces
- Oversize 24" D x 24" W top step for easier worker movement
- Removable 10" D x 24" W tool tray fits on front or side railing
- · 300 lbs. load rating
- · Kleton Blue enamel finish



х

### TILT-N-ROLL LADDERS

- · Balanced design allows ladder to tilt into the rolling position
- · Ladder moves easily two 4" casters
- · One piece all welded steel construction
- · Legs have reinforced rubber tips that hold ladder secure during use

0A

Height"

57

68

77

86

Optional tool tray

Base

W" x D"

х

х

х

44

50

56

62 х

25

25

25

25

lbs.

70

81

93

9

- · Oversize 24" W x 24" D top step allows worker
- more freedom/movement and comfort

Platform

Height"

27

38

47

56

- 30" high rails with 24" wide expanded metal steps
- · 300 lbs. load rating

Model

MD603

**MD604** 

MD605

MD606

MH242

No.

• Kleton Blue enamel finish Number

of Steps

3

4

5

6



## **ROLLING STEP STANDS**

- · For use in record storage rooms, offices and warehouses
- · Rolls into position and locks firms to the floor
- · Casters retract under operator's weight
- Rubber tipped feet drop down
- · Capacity: 300 lbs.

Model	Number	Platform	E	Bas	e	Wt.
No.	of Steps	Height"	W"	х	D"	lbs.
XX001	3	28	20	х	30	40
XX002	4	37	20	х	41	46

