

Before ordering any pump, establishing compatibility with the MSDS of the fluid used in application is a must! Bond/ground cables on page B116 are required when pumping flammable or combustible liquids.

DRUM PUMPS

ROTARY DRUM PUMPS

POLYPROPYLENE

- 3-section polypropylene suction tubes
- Well suited for non-volatile materials such as alkalines, detergents, mild acids, waxes, water-based chemicals
- Pumps 12 oz. per rotation
- 2" Drum adaptor • Wt.: 3.65 lbs.

Model No. DB998

TEFLON®

- 3-section Teflon® suction tubes
- Durable and lightweight with high chemical resistance
- Applicable for most aggressive acids and alkalines compatible with Teflon®
- Pumps 12 oz. per rotation
- 2" Drum adaptor • Wt.: 4.41 lbs.

Model No. DB997



#304 STAINLESS STEEL


- Stainless steel discharge spout and 3-section stainless steel suction tubes
- Ideal for non-flammable chemicals and liquids such as acids, alcohols, solvents, etc.
- Pumps 12 oz. per rotation
- 1 1/2" and 2" drum adaptor
- Wt.: 3.85 lbs.

Model No. DB759

POLYPHENYLENE SULPHIDE

- 3-section stainless steel suction tubes
- Most advanced non-oxidation and rust-free materials used ensure durability of pump
- Clockwise rotary operation for maximum efficiency
- Pumps 12 oz. per rotation
- 1 1/2" and 2" drum adaptor
- Wt.: 5.85 lbs.

Model No. DB999

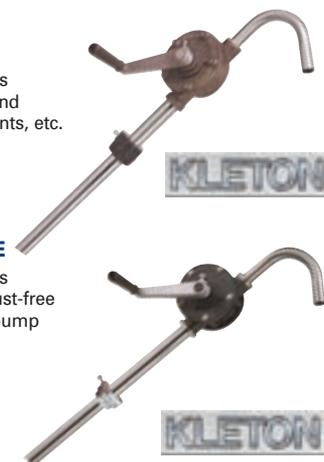

HEAVY-DUTY PLASTIC LEVER PUMPS

- Self-priming, constructed of engineered polypropylene
- Telescoping suction tube is designed for dispensing oil type fluids from 25 and 45-gallon drums and storage tanks
- Feature a discharge of 1 quart per 3 downstrokes through an anti-drip nozzle having a pump alignment of 360°

Model No.	Lever Pump Seal	Wt. lbs.
DA518	BUNA-N (Nitrile)	3.1
DA686	Viton Seal	3.1
DA687	EPDM Seal	3.1



POLYPROPYLENE PUMP

- Constructed of polypropylene and polyethylene
- Self venting pump prevents corrosion and contamination when used with most chemicals or acids
- Dispenses 8 oz. per stroke
- Attaches to any standard 3/4" or 2" drum opening on 5 to 45-gallon drums
- 360° discharge spout orientation
- Wt.: 1 lbs.

Model No. DA532



POLYPROPYLENE LEVER PUMP

- Delivers approximately 10 ounces per stroke with a capability of 6-gallons per minute
- Manufactured of the highest quality polypropylene
- Will handle viscous materials equivalent to SAE #90 oil; also compatible with most acids, caustics and other mild liquids
- 2" bung adaptor and telescoping extension tube for use with 5 to 45-gallon drums
- 360° discharge spout orientation
- EPDM O-Rings
- Wt.: 2 lbs.

Model No. DA534



HEAVY-DUTY PLASTIC PUMPS

- Constructed entirely of engineered plastic, this heavy duty, pistonless pump discharges approximately one quart per 4 downstrokes
- 360° alignment and incorporates a swivel action anti-drip nozzle
- Suitable for most disinfectants, detergents, acids, cleaning fluids and chemical additives

Model No.	Drum Cap.	Seal	Wt. lbs.
DA515	5-45 gal.	BUNA-N (Nitrile)	2.5
DA517	45 gal.	Viton	2.3



NYLON PUMP

- Manufactured from heavy-duty nylon, this non-drip pump can handle all viscosities from paraffin to gear oil
- Viton seals
- Discharge rate of 26 gallons per 100 strokes
- Self priming and venting foot valve ensures greater longevity of moving parts and a minimum level of maintenance
- Detachable spout allows for discharge hose adaptability
- Dual thread 2" bung adaptor for plastic and steel drums
- Wt.: 2 lbs.

Model No. DA533




ECONOMICAL AIR OPERATED TRANSFER PUMPS

- An economical solution to effortless pumping
- A simple trigger action controls the fluid flow for precise dispensing right at the drum or up to 6' away
- Designed for pumping fluids such as engine oils, hydraulic oils, paraffin, degreasers, mild acids and alkalis
- Polypropylene construction with an acetal piston
- Pumps at a rate of 10-20 litres per minute depending on application
- Air pressure operating range: 29-102 PSI
- Ratio is 1:1
- Telescopic uptake tube: 16" to 36"
- Air regulator included

Model No.	Seal	Wt. lbs.
DA458	Nitrile	5.6
DA459	EPDM	5.6
DA460	Viton	5.6

Optional Hose Kit w/6 ft. 3/4" PVC hose, hose clips, support bracket, discharge hose adaptor and on/off tap. Wt.: 1 lbs.


Model No. DA468

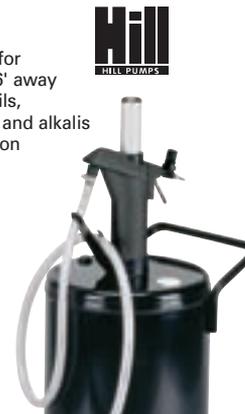

DIAPHRAGM HAND PUMP

- For petroleum fuels, light lubrication oils and water-based solutions
- Aluminum die cast construction with high nitrile rubber diaphragm
- 2" bung adaptor, 8' anti-static neoprene rubber hose and cast nozzle
- Wetted components: aluminum, steel, 304 SS, poly acetal and NBR nitrile rubber
- Transfer rate: 10 to 12 GPM
- Weight: 13 lbs.

Model No. DC068

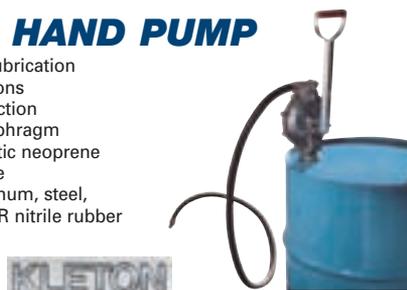

DRUM PUMPS & ACCESSORIES

Before ordering any pump, establishing compatibility with the MSDS of the fluid used in application is a must!
Bond/ground cables on page B116 are required when pumping flammable or combustible liquids.

STAINLESS STEEL PUMPS

- Efficient transfer of liquids from 25 or 45-gallon drums
- Stainless/Teflon® pump handles most liquids, including aggressive acids and corrosives
- 316 stainless steel construction with Teflon® piston, shaft and seal
- Stainless/polyethylene pump withstands phosphoric acids and alkalis
- Chrome plated steel pump with polyethylene components handles mildly corrosive water based fluids, solvents and light oils
- All pumps fit standard 2" bung and deliver 8 oz. per stroke
- 25" L with a 7" L x 1/2" O.D. spout and 22" L suction tube
- Weight: 3 lbs.



Model No.	Pump Construction
DA531	316 SS/Teflon®
DA530	304 SS/Polyethylene
DA527	Chrome Steel/Polyethylene

TRANSFER PUMP

- Non-corrosive, double action piston pump is designed to handle most petroleum products, solvents and industrial chemicals with viscosities up to 2000 SSU
- Discharges 1 quart per stroke with a suction lift to 15'
- Handle can be mounted above or below pump
- Tamper proof feature enables padlocking to protect against unauthorized use
- Thermoplastic constructed pump has a polyester glass reinforced body, Vitor® "O" ring and cork-nitrile gasket
- All internal metal parts in contact with liquid are 316 stainless steel
- Includes 8' PVC black vinyl discharge hose, 2-piece 1" x 34" L polyester suction tube, polyester discharge spout and 2" bung adaptor
- Weight: 11 lbs.



Model No. DA526

HORIZONTAL DRUM GAUGE

- Reads instantly and accurately the amount of liquid in a 45-gallon drum
- Mounts through 2" bung hole; seals tight and won't leak
- Reads in 5-gallon intervals
- Weight: 2 lbs.



Model No. DA067

GRADUATED DRUM GAUGES

- The solution to visually gauging contents of horizontal drums
- Excellent for most oils, solvents and chemicals
- Combination gauge and faucet permits uninterrupted draining of drum contents with gauge in place
- Mounts through 3/4" bung hole
- Constructed of heavy gauge glass in plated steel body with Buna-N seals
- Weight: 3 lbs.



Model No.	Description
DA064	Gauge only
DA065	Gauge with faucet*

*Zinc die cast faucet FM approved for viscous liquids only; no flame arrestor.

DRUM FILL GAUGE

- Provides a low cost solution to over-filling drums
- When drum is almost full, indicator "Pops-Up" to warn you
- Fits in standard 3/4" bung opening, and is 5"L
- Bright red and yellow moulded polyethylene
- FM approved
- Weight: 0.2 oz.

Model No. DA066



STAINLESS STEEL LIFT STYLE PUMPS

- Excellent for the fast transfer of acids and corrosives
- Delivers 22 oz. per stroke
- Model DA529 is constructed of 304 stainless steel with Teflon® seal
- Model DB845 is constructed of 316 stainless steel with Teflon® seal
- Fits standard 2" bung for 45 gallon drums
- 45" L with a 7" L x 3/4" O.D. spout
- Weight: 6 lbs.

Model No. DA529

Model No. DB845



ROTARY PUMPS

- Efficiently pumps 5 gallons per 80 handle revolutions
- Body and blades are constructed of rugged cast iron
- Model DA528 handles medium viscosity petroleum based products such as light oils
- Model DA536 with non-sparking nozzle is ideal for transferring gasoline and diesel fuel
- Both models pump in either direction, out the nozzle or in the nozzle, when used with partially submerged hose and cranked in opposite direction
- 1 1/4" x 40" steel suction tube, 1" discharge tube, 2" bung adaptor
- Weight: 17 lbs.

Model No. DA528

Model No. DA536



SAFETY PUMPS

- FM Approved for handling flammables
- Comes complete with internal flame arrestor, steel bung adaptor to aid static grounding, and heavy duty bonding wires to remove hazardous static charge
- Steel pickup tube with internal screen keeps debris out of pump
- Constructed of highly polished carbon steel with Teflon® piston, packing and gasket for exceptional chemical and solvent resistance
- Pumps 8 oz. per stroke, designed to fit 45 gallon drums
- Also available in stainless steel for corrosive flammable liquids
- Weight: 5 lbs.

Model No. DA513 Carbon Steel

Model No. DB831 Stainless Steel

VERTICAL DRUM GAUGES

- Accurate "At-A-Glance" monitoring
- Easy-to-read gauge is calibrated in gallons, litres and percentage remaining in drum
- Monitors liquid level in vertical 45-gallon drums
- Heavy steel and plastic construction with leak proof neoprene gaskets
- Resistant to oil and many chemicals
- Available for 3/4" or 2" NPT bung opening
- Weight: 1 lbs.



Model No.	Bung Size"
DA069	3/4
DA068	2



ENVIRO-WEDGE™

- Increases the amount of product pumped out of 25-45 gallon drums
- Reduces the amount of expensive product left in drum while also allowing for easier drum reconditioning and disposal
- 100% recycled, rugged polyethylene construction
- Weight: 1.5 lbs.

Model No. DA660



DRUM PUMPS & ACCESSORIES

Before ordering any pump, establishing compatibility with the MSDS of the fluid used in application is a must!
Bond/ground cables on page B116 are required when pumping flammable or combustible liquids.

STAINLESS STEEL PUMPS

- Efficient transfer of liquids from 25 or 45-gallon drums
- Stainless/Teflon® pump handles most liquids, including aggressive acids and corrosives
- 316 stainless steel construction with Teflon® piston, shaft and seal
- Stainless/polyethylene pump withstands phosphoric acids and alkalis
- Chrome plated steel pump with polyethylene components handles mildly corrosive water based fluids, solvents and light oils
- All pumps fit standard 2" bung and deliver 8 oz. per stroke
- 25" L with a 7" L x 1/2" O.D. spout and 22" L suction tube
- Weight: 3 lbs.



Model No.	Pump Construction
DA531	316 SS/Teflon®
DA530	304 SS/Polyethylene
DA527	Chrome Steel/Polyethylene

TRANSFER PUMP

- Non-corrosive, double action piston pump is designed to handle most petroleum products, solvents and industrial chemicals with viscosities up to 2000 SSU
- Discharges 1 quart per stroke with a suction lift to 15'
- Handle can be mounted above or below pump
- Tamper proof feature enables padlocking to protect against unauthorized use
- Thermoplastic constructed pump has a polyester glass reinforced body, Vitor® "O" ring and cork-nitrile gasket
- All internal metal parts in contact with liquid are 316 stainless steel
- Includes 8' PVC black vinyl discharge hose, 2-piece 1" x 34" L polyester suction tube, polyester discharge spout and 2" bung adaptor
- Weight: 11 lbs.



Model No. DA526

HORIZONTAL DRUM GAUGE

- Reads instantly and accurately the amount of liquid in a 45-gallon drum
- Mounts through 2" bung hole; seals tight and won't leak
- Reads in 5-gallon intervals
- Weight: 2 lbs.



Model No. DA067

GRADUATED DRUM GAUGES

- The solution to visually gauging contents of horizontal drums
- Excellent for most oils, solvents and chemicals
- Combination gauge and faucet permits uninterrupted draining of drum contents with gauge in place
- Mounts through 3/4" bung hole
- Constructed of heavy gauge glass in plated steel body with Buna-N seals
- Weight: 3 lbs.



Model No.	Description
DA064	Gauge only
DA065	Gauge with faucet*

*Zinc die cast faucet FM approved for viscous liquids only; no flame arrestor.

DRUM FILL GAUGE

- Provides a low cost solution to over-filling drums
- When drum is almost full, indicator "Pops-Up" to warn you
- Fits in standard 3/4" bung opening, and is 5"L
- Bright red and yellow moulded polyethylene
- FM approved
- Weight: 0.2 oz.

Model No. DA066



STAINLESS STEEL LIFT STYLE PUMPS

- Excellent for the fast transfer of acids and corrosives
- Delivers 22 oz. per stroke
- Model DA529 is constructed of 304 stainless steel with Teflon® seal
- Model DB845 is constructed of 316 stainless steel with Teflon® seal
- Fits standard 2" bung for 45 gallon drums
- 45" L with a 7" L x 3/4" O.D. spout
- Weight: 6 lbs.

Model No. DA529

Model No. DB845



ROTARY PUMPS

- Efficiently pumps 5 gallons per 80 handle revolutions
- Body and blades are constructed of rugged cast iron
- Model DA528 handles medium viscosity petroleum based products such as light oils
- Model DA536 with non-sparking nozzle is ideal for transferring gasoline and diesel fuel
- Both models pump in either direction, out the nozzle or in the nozzle, when used with partially submerged hose and cranked in opposite direction
- 1 1/4" x 40" steel suction tube, 1" discharge tube, 2" bung adaptor
- Weight: 17 lbs.

Model No. DA528

Model No. DA536



SAFETY PUMPS

- FM Approved for handling flammables
- Comes complete with internal flame arrestor, steel bung adaptor to aid static grounding, and heavy duty bonding wires to remove hazardous static charge
- Steel pickup tube with internal screen keeps debris out of pump
- Constructed of highly polished carbon steel with Teflon® piston, packing and gasket for exceptional chemical and solvent resistance
- Pumps 8 oz. per stroke, designed to fit 45 gallon drums
- Also available in stainless steel for corrosive flammable liquids
- Weight: 5 lbs.

Model No. DA513 Carbon Steel

Model No. DB831 Stainless Steel

VERTICAL DRUM GAUGES

- Accurate "At-A-Glance" monitoring
- Easy-to-read gauge is calibrated in gallons, litres and percentage remaining in drum
- Monitors liquid level in vertical 45-gallon drums
- Heavy steel and plastic construction with leak proof neoprene gaskets
- Resistant to oil and many chemicals
- Available for 3/4" or 2" NPT bung opening
- Weight: 1 lbs.



Model No.	Bung Size"
DA069	3/4
DA068	2



ENVIRO-WEDGE™

- Increases the amount of product pumped out of 25-45 gallon drums
- Reduces the amount of expensive product left in drum while also allowing for easier drum reconditioning and disposal
- 100% recycled, rugged polyethylene construction
- Weight: 1.5 lbs.

Model No. DA660

