

PALLET TRUCKS

KLETON

Rugged construction makes this pallet truck the best value for your material handling needs. Up to 27" W x 48" L forks feature entry rollers and tapered design for easy pallet entry and are reinforced for heavy-duty loads. The 3-function hand control (raise, neutral and lower) and the spring-loaded self-righting safety loop handle enhance comfort and ease of operation. Hardened chrome piston with protective dust cover for dependable performance. Durable powder coat finish.



HYDRAULIC PALLET TRUCKS

- Heavy-duty polyurethane tread bonded to cast iron core steering wheels and rollers provide superior performance
- Maintenance-free sealed bearings at all pivot points
- 6" (152 mm) wide forks
- Colour: High visibility orange
- Meets CE standards
- 1-year pump warranty

Model No.	Pallet Truck Height		Fork Width in"	Fork Length in"	Capacity lbs.
	Lowered in"	Raised in"			
MJ484	2 7/8	7 3/4	20 1/2	36	5500
MJ485	2 7/8	7 3/4	20 1/2	42	5500
MJ486	2 7/8	7 3/4	20 1/2	48	5500
MJ487	2 7/8	7 3/4	27	36	5500
MJ488	2 7/8	7 3/4	27	42	5500
MJ489	2 7/8	7 3/4	27	48	5500



MJ484

HEAVY-DUTY HYDRAULIC PALLET TRUCKS

- Heavy-duty polyurethane tread bonded to cast iron core steering wheels and rollers provide superior performance
- Double rollers for easy moving of extra heavy loads
- Reinforced fork channels deliver exceptional durability
- 6" (152 mm) wide forks
- Colour: Kleton blue
- Meets CE standards
- 2-year pump warranty

Model No.	Pallet Truck Height		Fork Width in"	Fork Length in"	Capacity lbs.
	Lowered in"	Raised in"			
MJ490	2 7/8	7 3/4	20 1/2	36	6600
MJ491	2 7/8	7 3/4	20 1/2	42	6600
MJ492	2 7/8	7 3/4	20 1/2	48	6600
MJ493	2 7/8	7 3/4	27	36	6600
MJ494	2 7/8	7 3/4	27	42	6600
MJ495	2 7/8	7 3/4	27	48	6600



Polyurethane tread bonded to cast iron core steering wheels

2-YEAR PUMP WARRANTY


MJ490

PALLET HANDLING EQUIPMENT

ADJUSTABLE WIDTH PALLET TRUCK

- Fork width adjusts from 21" to 27"
- Fork length: 46"
- 7" mould-on polyurethane steering wheel
- 3" mould-on polyurethane load wheels
- Raised height: 7.75"
- Lowered height: 3"
- Forks width: 6"
- Capacity: 5,500 lbs

Model No. MI820

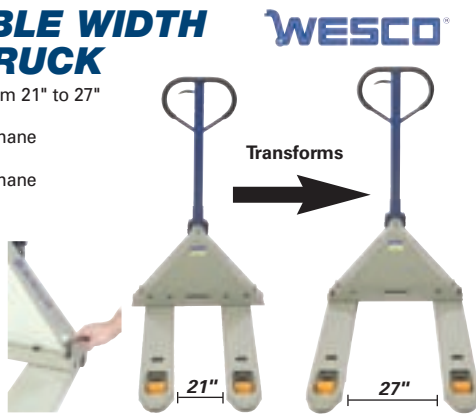

WESCO®

TRANSROLLER PALLET TRUCK

- Move loads forward and backward as well as side to side
- Fork spacing is 27" wide and 48" in length
- 7" wide forks include entry rollers and 3" mold-on load wheels
- 8" mold-on polyurethane steering wheels
- Lowered height: 3.4"; raised height: 8.5"
- Capacity: 5000 lbs. in standard mode and 2200 lbs. in lateral mode

Model No. MJ550

WESCO®



POWER-START TECHNOLOGY™ PALLET TRUCK


The right tool for ergonomic pallet motion!

- Reduces starting resistance even when truck is heavily loaded
- Select travel direction via option on handgrip, squeeze the handgrip, pump the tow bar and the truck is launched in the walking direction
- When handgrip is pressed downward, and tow bar raised, the truck is launched in the direction of the forks

Specifications:

- Forks: 27" x 48"
- Minimum fork height: 3"
- Maximum fork height: 7.5"
- Rated capacity: 5000 lbs.
- Weight: 188 lbs.

Model No. MH736



LIMITED
2
YEAR
WARRANTY

LIFRITE®

LIFT-RITE® TITAN PALLET TRUCKS

- New one-piece pump for improved performance and reliability
- Includes ergonomic handles and articulating steering wheels
- 3" fork lowered height, 7 3/4" fork raised height
- 7" fork width
- Capacity: 5,500 lbs.

Model No	Frame Width"	Fork Length"	Wt. lbs.
ML052	20.5	36	142
ML053	20.5	42	147
ML054	20.5	48	152
ML055	27	36	147
ML056	27	42	157
ML057	27	48	167

Note: Custom Sizes Available



LIMITED
2
YEAR
WARRANTY

TITAN

ERGONOMIC PALLET TILTER

- Reliable pallet tilter allows users to tilt and lift pallets to a more convenient and safe work position
- 5" polyurethane steering wheels combined with 3" polyurethane load wheels for mobility
- Forks tilt up to 90° for accurate load positioning
- Lifting range with forks in horizontal position: 3 1/4" to 11"
- Lifting range with backrest in horizontal position: 29" to 37"
- Load center: minimum 7 1/2", maximum 15 1/2"
- 6 1/2" forks are spaced 21 1/2" wide by 31" in length
- Total capacity: 2,200 lbs.
- Weight: 393 lbs.
- 1 year manufacturer's pump warranty

Model No. MK824

WESCO®



LOW PROFILE LIFT-RITE® HYDRAULIC PALLET TRUCKS

- Capacity: 5000 lbs
- Polyurethane wheels and steel rollers

Model No.	Fork lowered Height"	Raised Height"	Frame Width"	Fork Length"	Wt. lbs.
MH734	2	6 3/4	27	48	175
MH735	1 3/4	6 1/2	27	48	175

Note: Ultra low profile available



LIMITED
2
YEAR
WARRANTY

LIFRITE®

4-WAY LIFT-RITE® HYDRAULIC PALLET TRUCK

- 2" fork lowered height, 6 3/4" fork raised height
- 6" wide forks
- Capacity: 5000 lbs.

Model No.	Frame Width"	Fork Length"	Wt. lbs.
MH737	33	48	205



LIFRITE®

LIMITED
2
YEAR
WARRANTY

PALLET HANDLING EQUIPMENT

SKID LIFTS

- Allows entry into different skids and baskets
- Lightweight design is easy to manoeuvre with pallet truck style steering configuration
- Strong and reliable cylinder
- Quick-lift mechanism on manual lifts allows loads under 400 lbs. to be raised with 24 strokes, heavier loads require 72 strokes
- Self-contained battery powered power pack (electric models) eliminates power source or power cord problems
- Built-in automatic battery charger and charge indicator (electric models)
- Raised bulkhead design provides greater backrest surface, ergonomic location for automatic battery charger and clear view of load
- 24" load center
- Lowered height: 3 1/4", raised height: 31 1/2"
- 8" polyurethane load wheels and 3" polyurethane load roller
- Capacity: 3000 lbs.



LIFFRITE

Model No.	Dim. of forks"	Wt. lbs.
MANUAL LIFTS		
MH748	20.5 x 48	330
MH749	27 x 48	340

Model No.	Dim. of forks"	Wt. lbs.
ELECTRIC LIFTS		
MH796	20.5 x 48	430
MH797	27 x 48	440

GALVANIZED PLATED PALLET TRUCK

- Designed to withstand corrosive and wet environments
- Ideal for use in chemical, pharmaceutical and wash-down applications
- Steering and load wheels are made of nylon to provide durability in cold environments
- Fork length: 48"
- Overall fork width: 27"
- Load capacity: 5,500 lbs.
- Lowered fork height: 2 7/8"
- Raised fork height: 7 3/4"
- Weight: 327 lbs.
- **Not approved for clean rooms**

Model No. MK830



STAINLESS STEEL PALLET TRUCKS




- Ideal for sanitary, pharmaceutical, medical, food and wet applications
- Available with type 304 stainless steel frames and forks or complete stainless steel construction
- Complete stainless steel units are ideal for food service when combined with food-approved hydraulic oil
- All models feature nylon steering and load wheels
- Fork height: 2 7/8" minimum, 7 3/4" maximum
- Capacity: 5,500 lbs.
- **Not approved for clean rooms**



Model No.	Description	Overall Fork Width"	Fork Length"	Wt. lbs.
MK827	Stainless Steel Frame and Forks	27	48	285
MK828	Complete Stainless Steel	27	48	285
MK829	Complete Stainless Steel	20	48	300

FORK EXTENSIONS

- Handle large and odd shaped loads with increased stability and minimum damage
- Available in 4", 5" and 6" fork widths, lengths are from 54" to 96"
- Easy to use slide-on design
- Fork fits up to 2" thick
- Convenient on/off design
- Locking bar keeps extensions in place
- Fork extension not to exceed 50% more than existing fork

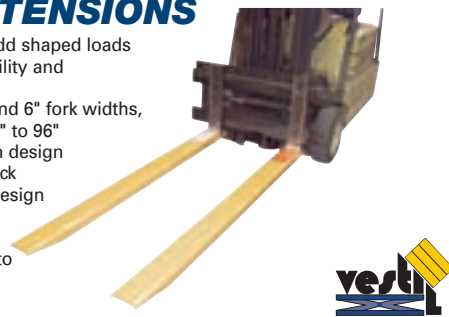

Model No.	Accommodates Fork Width"	Fork Extension Overall Width"	Length"	Max. Fork Thickness"	Wt. lbs.
MF775	4	5	54	2	109
MF776	4	5	63	2	125
MF777	4	5	72	2	135
MF778	4	5	84	2	157
MF779	4	5	96	2	173
MF781	5	6	54	2	126
MF782	5	6	63	2	151
MF783	5	6	72	2	155
MF784	5	6	84	2	189
MF785	5	6	96	2	201
MF787	6	7	54	2 1/2	146
MF788	6	7	63	2 1/2	165
MF789	6	7	72	2 1/2	166
MF790	6	7	84	2 1/2	199
MF791	6	7	96	2 1/2	210

Also available: Add-on for optional pins style fork extension and other lengths.

CAROUSEL PALLET TURNTABLES

Loading and unloading operations that originally required a large amount of time can be done more efficiently with less fatigue and risk of back injury. The carousel may be added to an existing workbench, scissors table or simply placed on the floor. This *Lazy Susan* concept is constructed from two pieces of rolled structural angle. A series of roller bearings transfer the load smoothly and evenly to the supporting surface. Overall height is 2 1/4".



Model No.	Outside Diameter"	Capacity lbs.	Wt. lbs.
MH204	40	2000	40
MH205	40	4000	44
MH206	40	6000	48
MH207	48	2000	48
MH208	48	4000	51
MH209	48	6000	55