

STEP STOOLS, STANDS & LADDERS

STEP STOOLS

KIK-STEP

- Extra heavy-duty steel
- Comes with a double platform with non-slip rubber tread
- Spring-loaded casters retract under slight pressure, forcing base to the floor
- 11" diameter upper platform and 13 1/2" diameter lower platform
- 15 5/8" diameter base has an all-around protective bumper
- 14" overall height
- Wt.: 10 lbs.
- Colour: Black

Model No. OC664



STEP STOOL

- Tough one piece poly construction with anti-skid bottom
- Threaded top and expanded step
- 16" diameter base provides added stability
- Glides easily on retractable rubber casters
- 13" overall height
- Capacity: 300 lbs.
- Wt.: 7 lbs.

OA300



Model No.	Mfg. No.	Colour
OA299	2523BL	Black
OA300	2523BE	Beige

FOLDABLE STEP-STOOL

- Slip resistant surfaces on steps and foot pads
- Stands upright when folded and requires minimum space for storage
- Easy to clean and resistant to dents and rust
- Capacity: 300 lbs.

Model No. MH866




DIXIE STEP STOOLS

- Durable, non-corrosive, 500-lbs. capacity polyethylene construction
- Two, three and four step models have rear opening to access storage compartments
- Hand holes and lightweight combine for easy manoeuvrability
- All models include rubber feet and non-skid tape surface
- Colour: Safety yellow for visibility

SINGLE STEP

Dimensions: 18" L x 12" W x 12" H
Weight: 10 lbs.


Model No. MK776



DOUBLE STEP

Dimensions: 22" L x 21" W x 20" H
Weight: 22 lbs.

Model No. MK777



TRIPLE STEP

Dimensions: 32" L x 22" W x 30" H
Weight: 33 lbs.

Model No. MK778



Dixie Poly Drum Corp

QUAD STEP WITH CASTERS

Dimensions: 45" L x 25" W x 69.5" H
Weight: 53 lbs.

Model No. MK779



STEP STANDS

- Rugged all welded construction
- Rolling stands come with spring-loaded casters
- Dimensions: 16" D x 12" H
- Capacity: 300 lbs.
- Colour: Kleton blue



PLATFORM STANDS

Model No.	Width"	Wt. lbs.
MH228	20	11
MH229	24	13
MH230	32	16

ROLLING STANDS

Model No.	Width"	Wt. lbs.
MH225	20	17
MH226	24	19
MH227	32	22



MH228



MH225

HEAVY-DUTY ALUMINUM SAWHORSE/STEP

- Engineered to allow for convenient mixing of sizes in plank applications
- Durable extruded aluminum steps and side rails, serrated for strength and safety
- Trestle design allows safe access from either side
- J-shaped spreaders for easy set-up and storage
- Heavy-duty rubber safety shoes



Model No.	Height'	Open Height"	Base Width"	Base Depth"	Weight lbs.
VC010	2	23	32	24.5	10
VC011	3	35	33	32	14
VC012	4	47.5	34.5	34.5	19



4' ALUMINUM LIGHT-DUTY PLATFORM LADDER

- 1" tubular construction makes this ladder light weight and compact for storage
- Handrail with comfort foam grip
- Fold-down utility tray for paint, tools, etc
- Non-marring, slip-resistant feet
- Overall height: - closed: 55"
- open: 51"
- Overall platform height: 22 1/2"
- Approx. weight: 8 lbs.

Model No. TJZ869



FIBERGLASS LADDERS


CHOOSE THE RIGHT LADDER IN 4 EASY STEPS ...

1. WHAT STYLE?



Stepladder

Perfect for projects requiring a smaller reach.



Multi-Way Ladder

Can be used as a stepladder, Trestle ladder, Stairway ladder or Extension Ladder.




Extension Ladder

Ideal for projects requiring greater height.

3. WHAT MATERIAL?


Aluminum

- Lightweight
- Strong
- Resists corrosion



Fiberglass

- Strong and durable
- Safe for work with or near electricity
- Resists corrosion



2. WHAT HEIGHT?

Stepladder

Max. Height You Want to Reach*	Buy This Size
7'	4'
8'	5'
9'	6'
10'	7'
11'	8'
12'	10'
14'	12'
16'	14'
18'	16'
20'	18'
22', 24'	20'

*Assumes a 5' 6" person with a vertical 12" reach.

Extension Ladder

Height of Top Support Point	Buy This Size*
9' max.	16'
9' to 13'	20'
13' to 17'	24'
17' to 21'	28'
21' to 25'	32'
25' to 28'	36'
28' to 31'	40'

*Reflects section overlap, ladder angle.

4. WHAT LOAD CAPACITY?

Formula:

Your Weight



Load Capacity



Material Weight

Typically Add:

75 lbs. For Heavy-Duty Projects
50 lbs. For Light-Duty Projects



200 lbs.

CSA Grade 3 Household

225 lbs.

CSA Grade 2 Tradesman and Farm

250 lbs.

CSA Grade 1 Construction and Industrial

300 lbs.

Construction and Industrial meets ANSI Type1A, Extra Heavy Duty

375 lbs.

Construction and Industrial meets ANSI Type1AA, Special Duty

THE "BRUTE" STEPLADDERS

(6800 SERIES)

CSA certified grade 1

ANSI approved type 1a - 375 lbs. Load Rating

- Designed for the most demanding industrial applications
- Durable non-conductive "C" channel side rails in high-visibility safety yellow
- Features slip-resistant serrated aluminum steps
- Tough moulded copolymer top
- Inside spreader arms, heavy-duty rubber safety shoes and unique solid triangular step braces for extra durability



Model No.	Nominal Height'	Base Width"	Spread"	Wt. lbs.
MF561	4	18	31	18
MF562	6	21	43	24
MF563	8	23	55	33
MF564	10	26	67	39
MF565	12	28	78	50



EXTRA HEAVY-DUTY STEPLADDERS

(6900 SERIES)

CSA certified grade 1

ANSI approved type 1a - 300 lbs. Load Rating

- Durable non-conductive "C" channel side rails in high visibility safety yellow
- Slip-resistant serrated aluminum steps
- Heavy-duty rubber safety shoes
- Also comes with a tough moulded copolymer top and J-style spreader arms



Model No.	Nominal Height'	Base Width"	Spread"	Wt. lbs.
MF606	3	19	23	12
MF607	4	20	28	15
MF608	5	21	34	18
MF609	6	23	39	21
MF610	7	24	44	24
MF611	8	25	50	28
MF612	10	28	61	35
MF613	12	31	74	42



HEAVY DUTY FIBREGLASS "GRATE" STEPLADDER

(5900 SERIES)

CSA certified grade 1

ANSI approved 1A - 300 lbs. Load Rating

- Front and rear stabilizer feet provide safe surface contact for use on grated floors
- Durable non-conductive "C" channel side rails in high visibility safety yellow
- Slip-resistant serrated aluminum steps
- Stabilizers feature full serrated rubber shoes
- Rust-resistant coated steel braces front and rear
- Horizontal braces



Model No.	Nominal Height'	Open Height"	Highest Standing Point"	Base Width"	Base Depth"	Wt. lbs.
VC051	6	68	45	35	39	27
VC052	8	90	67	37	50	35
VC053	10	113	90	40	61	44
VC054	12	137	114	43	74	59



PLATFORM STEPLADDERS

(6500 SERIES)

CSA certified grade 1

ANSI approved type 1A - 300 lbs. load rating

- Ideal for all types of fixed height work
- Durable non-conductive "C" channel side rails in high visibility safety yellow
- Slip resistant serrated aluminum steps and platform
- Features a platform size of 14" x 18", J-style spreader arms and heavy-duty rubber safety shoes



Model No.	Nominal Height'	Platform Height"	Base Width"	Spread"	Wt. lbs.
MF411	6	46	24	42	25
MF412	8	68	26	53	33
MF413	10	92	30	67	41



FIBERGLASS LADDERS

HEAVY-DUTY STEPLADDERS

(6400 SERIES)



CSA Certified Grade 1

ANSI Approved Type 1A - 300 lbs. Load Rating

- Durable non-conductive "C" channel side rails in high viz safety yellow
- Slip-resistant serrated aluminum steps, moulded copolymer top, widened flare for greater stability
- Inside spreader arm with wrap-around brackets for added strength
- Double bracing on bottom steps
- Full rear horizontal braces every 12", added front steps K brace
- Heavy duty rubber safety shoes

Model No.	Nominal Height'	Base Width"	Spread"	Wt. lbs.
MD487	3	19	23	12
MD488	4	20	28	16
MD489	5	21	34	19
MD490	6	23	39	22
MD491	8	25	50	30
MD492	10	28	61	36
MD493	12	31	74	45



HEAVY-DUTY FIBREGLASS STEPLADDERS

(6300 SERIES)

CSA Certified Grade 1.

ANSI Approved Type 1 - 250 lbs. Load Rating

- Super tough moulded copolymer top
- Strong non-conductive orange "C" channel side rails
- Slip-resistant serrated aluminum steps
- Widened flare for greater stability
- Black ABS, high impact, non-marking end caps
- Heavy-duty safety rubber shoes



Model No.	Max Open Height'	Highest Length"	Standing Height"	Base Width"	Base Depth"	Wt. lbs.
VC023	4	46	23	20	28	17
VC024	5	57	34	21	34	18
VC025	6	68	45	23	39	20
VC026	7	79	56	24	44	23
VC027	8	90	67	25	50	26



SINGLE & EXTENSION LADDERS

(6200 SERIES)



CSA Certified Grade 1

ANSI Approved Type 1A - 300 lbs. Load Rating

- Durable non-conductive "C" channel side rails in high visibility safety yellow
- Riveted rung rail design maintains continuous strength of fibres
- Mounted slide guide
- Pulley keeps rope away from climber's feet & eliminates need for cross-bar
- Features exclusive 1 piece foot assembly with spur wheel and heavy-duty spring loaded die cast rung lock

SINGLE SECTION STRAIGHT (6100 SERIES)

Model No.	Length'	Width"	Wt. lbs.
MF380	8	17 3/8	18
MF381	10	17 3/8	21
MF382	12	17 3/8	24
MF383	14	17 3/8	28
MF384	16	17 3/8	32

2 SECTION EXTENSION (6200 SERIES)

Model No.	Length'	Working Length'	Width"	Wt. lbs.
MF405	16	13	17 3/8	38
MF406	20	17	17 3/8	44
MF407	22	19	17 3/8	48
MF408	24	21	17 3/8	52
MF409	28	25	17 3/8	59
MF410	32	28	17 3/8	66

D-RUNG

Model No.	Length'	Working Length'	Width"	Wt. lbs.
MF385	16	13	17 3/8	38
MF386	20	17	17 3/8	44
MF387	22	19	17 3/8	48
MF388	24	21	17 3/8	52
MF389	28	25	17 3/8	59
MF390	32	28	17 3/8	66
MF391	36	32	19	96
MF392	40	35	19	106



TWO-WAY STEPLADDERS

(6600 SERIES)

CSA Certified Grade 1

ANSI Approved Type 1A - 300 lbs. Load Rating

- Double front construction allows access from either side
- Durable non-conductive "C" channel side rails in high visibility safety yellow
- Extra thick top brackets for greater stability
- Slip-resistant serrated aluminum steps, J-style spreader arms and heavy-duty rubber safety shoe



Model No.	Nominal Height'	Base Width"	Spread"	Wt. lbs.
MF414	6	23	60	26
MF415	8	25	75	36
MF416	10	28	92	46



MEDIUM-DUTY FIBREGLASS STEPLADDERS

(5800 SERIES)

CSA Certified Grade 2

ANSI Approved Type 2 - 225 lbs. Load Rating

- Super tough moulded copolymer top
- Durable non-conductive "C" channel side rails in high visibility safety red
- Slip-resistant serrated aluminum steps
- Heavy-duty safety rubber shoes



Model No.	Open Height'	Highest Height"	Standing Height"	Base Width"	Base Depth"	Wt. lbs.
VC028	4	45	23"	18	30	12
VC029	5	57	34"	19 1/2	35	15
VC030	6	68	45"	30 3/4	40	18



HEAVY DUTY FIBERGLASS EXTENSION LADDERS

(6300 SERIES)

CSA Certified Grade 1

ANSI Approved Type 1- 250 lbs. Load Rating


- Durable non-conductive "C" channel side rails in high visibility safety orange
- Rung through rail design
- Heavy-duty serrated "D" rungs prevent slipping for safe and sure climbing
- Black ABS, high impact, non-marking end caps
- Heavy-duty spring loaded rung locks
- Extra heavy-duty swivel feet with ice pick



Model No.	Height'	Max Open L'	Base section Outside Width"	Inside Width"	Ply section Outside Width"	Inside Width"	Weight Lbs.
VC013	16	13	17	14 5/8	16 1/2	14 1/4	31
VC014	20	17	17	14 5/8	16 1/2	14 1/4	36
VC015	24	21	17	14 5/8	16 1/2	14 1/4	43



REPLACEMENT PARTS/ACCESSORIES

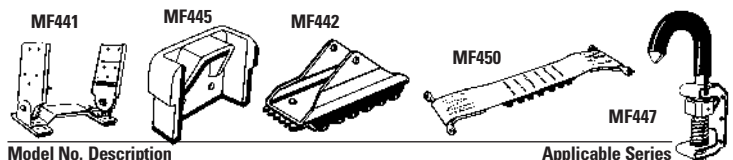

Model No.	Description	Applicable Series
MF436	Step Ladder Safety Feet - 4/kit	6400, 6500
MF437	Step Ladder Safety Feet - 4/kit	6600
MF439	Copolymer Top	6400, 6800, 6900
MF441	Extension and Straight Ladder Safety Feet (Standard 1 piece assembly)	6100, 6200
MF442	Extension and Straight Ladder Safety Feet (Optional duo feet) - 2/kit	6100, 6200
MF445	Extension Ladder End Caps - 4/kit	6100, 6200
MF447	Single Cable Hook	6100, 6200
MF450	Pole Strap	6200




ALUMINUM LADDERS

TWO-WAY STEPLADDERS

(4600 SERIES)

CSA Certified Grade 1

ANSI Approved Type 1A - 300 lbs. Load Rating

- Double-front construction allows access from either side
- 3 1/2" serrated steps and side rails
- Solid triangular step braces provide rigidity
- Features extra thick top brackets for greater stability; "J" shape spreader arms and heavy-duty rubber safety shoes. 

Model No.	Nominal Height'	Base Width"	Spread"	Wt. lbs.
MF399	6	23	56	25
MF400	8	26	73	32
MF401	10	29	89	41




PLATFORM STEPLADDERS

(4500 SERIES)

CSA Certified Grade 1

ANSI Approved Type 1A - 300 lbs. Load Rating

- Ideal for fixed height work
- 1/2" serrated steps and side rails
- Solid triangular step braces provide rigidity
- Features slip resistant serrated platform 14" x 18", "J" shape spreader arms and heavy-duty rubber safety shoes 

Model No.	Nominal Height'	Platform Height"	Base Width"	Spread"	Wt. lbs.
MF393	6	46	24	42	22
MF394	8	69	27	54	28
MF395	10	92	31	65	35
MF396	12	115	34	78	43
MF397	14	136	36	87	52
MF398	16	158	39	102	60




HEAVY-DUTY ALUMINUM STRAIGHT LADDERS

(7100 SERIES)

CSA Certified Grade 1

ANSI Approved Type 1 - 250 lbs. Load Rating


- Heavy-duty "C" channel construction
- Side rails: 2 1/2" x 1" for straights up to 14'
- Side rails: 3" x 1" for straights up to 16' and up
- Heavy-duty serrated "D" rungs prevent slipping for safe and sure climbing
- Black ABS, high impact, non-marking end caps
- Heavy-duty safety shoes 

Model No.	Outside H'	Outside W"	Inside W"	Wt. lbs.
VC016	8	16 3/4	14 5/8	10
VC017	10	16 3/4	14 5/8	13
VC018	12	16 3/4	14 5/8	15
VC019	14	16 3/4	14 5/8	18
VC020	16	16 3/4	14 5/8	23
VC021	18	16 3/4	14 5/8	27
VC022	20	16 3/4	14 5/8	29



REPLACEMENT PARTS/ACCESSORIES

MF443/MF444



MF440



MF434




Model No.	Description	Applicable Series
MF434	Step Ladder Safety Feet - 4/kit	4400, 4500
MF435	Step Ladder Safety Feet - 4/kit	4600
MF438	Pail Tray	4400
MF439	Copolymer Top	4400
MF440	Extension and Straight Ladder Safety Feet - 2/kit	4100, 4200
MF443	Extension Ladder End Caps - 4/kit (16' to 32')	4200
MF444	Extension Ladder End Caps - 4/kit (36' to 60')	4200

INDUSTRIAL STEPLADDERS

(4400 SERIES)

CSA Certified Grade 1

ANSI Approved Type 1A - 300 lbs. Load Rating

- 3 1/2" serrated steps and side rails
- Solid triangular step braces
- Mould copolymer top and pail tray heavy-duty hinged
- Rubber safety shoes 

Model No.	Nominal Height'	Base Width"	Spread"	Wt. lbs.
MA640	4	20	29	14
MA641	6	23	41	20
MA642	8	26	54	26
MA643	10	29	66	33
MA644	12	32	78	41
MA645	14	35	88	51
MA646	16	38	102	59




MEDIUM-DUTY ALUMINUM STEP LADDERS

(2400 SERIES)

CSA Certified grade 2

ANSI Approved type 2 - 225 lbs. Load Rating

- Super tough moulded copolymer utility top
- Durable yet light-weight extruded side rails
- 3" slip-resistant serrated steps
- J-shaped spreader arms
- Heavy-duty rubber safety shoes 

Model No.	Nominal Height'	Open Height"	Highest Standing Height"	Base Width"	Base Depth"	Wt. lbs.
MF063	4	45	24	18	31	9
MF064	6	67	45	21	44	13
MF065	8	90	67	23	56	19



EXTRA HEAVY-DUTY ALUMINUM EXTENSION/STRAIGHT

(4100 / 4200D SERIES)

CSA Certified Grade 1

ANSI Approved Type 1A - 300 lbs. Load Rating

- Rigid box section side rails, unequalled for strength and durability
- Side-mounted rope pulley and slide guide system keeps rope clear of climbers feet and allows easy raising (only on 4200D Series)
- Yellow ABS, high impact non-marring end caps
- Premium heavy-duty rung locks (Only 4200D Series)
- Slip-resistant serrated "D" rungs for safe climbing and comfort (round rung on 4100 Series)
- Heavy-duty ribbed swivel feet with ice pick



SINGLE LADDERS (4100 SERIES)

Model No.	Nominal Length'	Working Length'	Width"	Wt. lbs.
MD506	8	-	14 5/8	13
MD507	10	-	14 5/8	16
MD508	12	-	14 5/8	19
MD509	14	-	14 5/8	22
MD510	16	-	14 5/8	25
MD511	18	-	14 5/8	28
MD512	20	-	14 5/8	31
MD513	22	-	16	41
MD514	24	-	16	44

EXTENSION LADDERS (4200D)

Model No.	Working Length'	Width"	Wt. lbs.
VC033	16	13	29
VC034	20	17	37
VC035	24	21	44
VC036	28	25	50
VC037	32	29	69
VC038	36	32	78
VC039	40	35	86
VC040	44	39	94

Series 4200D

Series 4100




LADDERS

MULTI-PURPOSE JAWS™ TELESCOPIC LADDER

CSA APPROVED GRADE 1

ANSI APPROVED TYPE 1AA - 375 LBS. LOAD RATING

- Easily folds for storage or transport, compact + multifunctional
- Flared ends with slip-resistant feet provide superior stability in any position
- Polymer rung locks are virtually indestructible
- Extra deep side rails make the Jaws™ stiffer and stronger
- Mechanical interlocking tooth hinges for superior strength and 5 locking positions

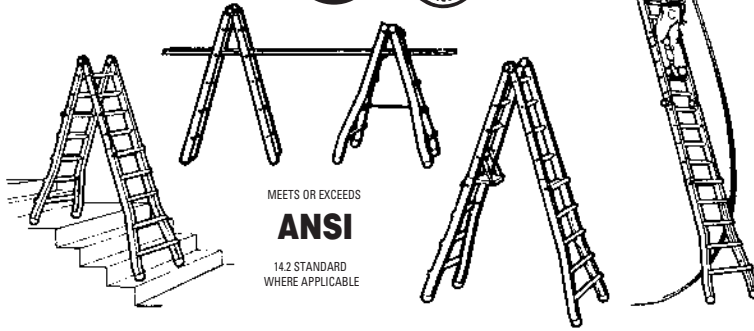

MEETS OR EXCEEDS
ANSI
14.2 STANDARD
WHERE APPLICABLE



HIGH-PERFORMANCE TELESCOPING CLIMBING SYSTEM

Model No.	Folded Height	Extension Range'	Stepladder Range'	Scaffold Height'	Wt. lbs.
MA740	4' 9"	9 to 15	4 1/2 to 7 1/2	1 to 4	36
MA741	5' 9"	11 to 19	5 1/2 to 9 1/2	1 to 5	41
MA742	6' 9"	13 to 23	6 1/2 to 11 1/2	1 to 6	50


HEAVY-DUTY & EXTRA HEAVY-DUTY ARTICULATING LADDERS

CSA Certified Grade 1 - 250 lbs. Load Rating (MF538 and MF539)
ANSI Approved Type 1 - 250 lbs. Load Rating (MF538)
ANSI Approved Type 1A - 300 lbs. Load Rating (MF539)

- Versatile tool for wide variety of industrial/commercial jobs
- Converts easily from straight ladder to stepladder or scaffolding unit



Model No.	Straight Ladder Length'	Stepladder Height'	Scaffold Height'	Wt. lbs.
MF538	12	6	3	23
MF539	16	8	4	46

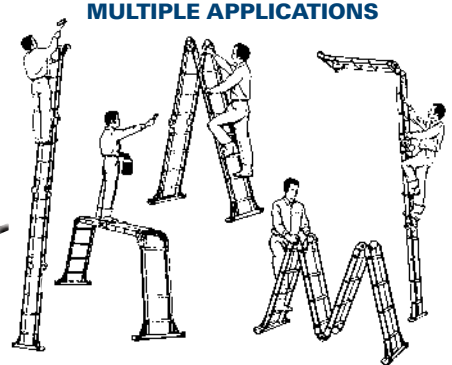

MULTIPLE APPLICATIONS

STOP-STEP LADDERS

- Stops still when you step on it
- Gives 18" to 54" of firm footing
- 1" square high tensile aluminum struts, frames and braces
- Heavy-gauge extruded aluminum 16" x 8" cross steps with 9" raise
- Long-lasting 1 5/8" retractable casters allow rubber base cups to grip floor
- 10 year limited warranty
- Download rating: 300 lbs.
- Shipped knocked down
- Colour: Beige
- OSHA compliant



MD624

MD627



Model No.	Number of steps	Top Step Height"	Overall Dimensions			Wt. lbs.
			W"	x D"	x H"	
STOP-STEP						
MD623	2	18	21	x 19 3/4	x 22 3/4	16
MD624	3	27	21	x 26 3/4	x 31 3/4	22
MD625	4	36	22 3/4	x 33 1/2	x 40 3/4	34
STOP-STEP W/DOUBLE HANDRAIL						
MD626	3	27	21	x 26 3/4	x 56 1/2	32
MD627	4	36	23 3/4	x 33 1/2	x 65 1/2	39
MD628	5	45	25 1/4	x 40 1/2	x 74 1/2	50
MD629	6	54	26 1/4	x 47 1/4	x 83 1/2	64

ROLLING LADDERS

ROLLING SAFETY LADDERS



MA617




Certified as per ANSI A14.7

Note:
Ladders are not to be used as work platforms.

MA613



MA622

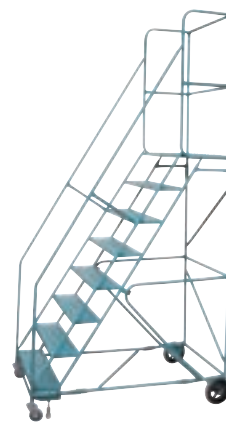

MA615



MA624

- Ideal wherever there is a need to reach bulky materials
- Roll easily into position and lock firmly to the floor for maximum safety
- 2 to 6-step ladders operate on spring-loaded casters
- Casters retract under operator's weight, rubber feet drop down
- First step on all 8 to 16-step ladders activates the floor locking mechanism (step off and kick release to make the ladder mobile)
- Non-clogging slip-resistant steel steps
- Frame is rugged welded 1" round steel tubing
- 8 to 16-step ladders shipped knocked down, easily assembled

Number of Steps	Model No.	Platform Height"	Overall Height"	Platform Size"	Base W" x D"	Wt. lbs.
WITHOUT HANDRAILS						
2	MA612	19	19	22 x 16	24 x 26	32
3	MA613	28	28	22 x 16	24 x 30	42
4	MH279	37	37	22 x 16	24 x 37	52
5	MA615	46	46	22 x 16	24 x 41	61
WITH HANDRAILS						
4	MA614*	37	78	22 x 16	30 x 36	78
5	MA616*	46	87	22 x 16	30 x 46	89
6	MA617*	55	95	22 x 16	30 x 51	100
8	MA622	72	113	30 x 16	38 x 60	180
10	MA623	89	130	30 x 16	38 x 72	230
12	MA624	109	149	30 x 16	38 x 80	250
14	MA625	128	167	30 x 16	38 x 93	275
16	MA626	144	185	30 x 16	38 x 104	305

* Only front casters are spring loaded.

MECHANICS/MAINTENANCE ROLLING LADDERS

- Double-straddle base puts worker in close proximity for hard-to-reach jobs
- Tilt and roll wheelbarrow mobility allows easy movement over rough surfaces
- Oversize 24" D x 24" W top step for easier worker movement
- Removable 10" D x 24" W tool tray fits on front or side railing
- 300 lbs. load rating
- Kleton Blue enamel finish



Tool Tray



Model No.	Number of Steps	Platform Height"	Overall Height"	Base W" x D"	Wt. lbs.
MH212	3	28 1/2	58 1/2	25 x 44	85
MH213	4	38	68	25 x 50	98
MH214	5	47 1/2	77 1/2	25 x 56	112
MH215	6	57	87	25 x 62	125

TILT-N-ROLL LADDERS

- Balanced design allows ladder to tilt into the rolling position
- Ladder moves easily two 4" casters
- One piece all welded steel construction
- Legs have reinforced rubber tips that hold ladder secure during use
- Oversize 24" W x 24" D top step allows worker more freedom/movement and comfort
- 30" high rails with 24" wide expanded metal steps
- 300 lbs. load rating
- Kleton Blue enamel finish



Model No.	Number of Steps	Platform Height"	OA Height"	Base W" x D"	Wt. lbs.
MD603	3	27	57	25 x 44	70
MD604	4	38	68	25 x 50	81
MD605	5	47	77	25 x 56	93
MD606	6	56	86	25 x 62	105
MH242				Optional tool tray	9



ROLLING STEP STANDS

- For use in record storage rooms, offices and warehouses
- Rolls into position and locks firms to the floor
- Casters retract under operator's weight
- Rubber tipped feet drop down
- Capacity: 300 lbs.



Model No.	Number of Steps	Platform Height"	Base W" x D"	Wt. lbs.
XX001	3	28	20 x 30	40
XX002	4	37	20 x 41	46

